UL 2-LED F

IP 20 | LED 24

Stainless steel triangular luminaire with homogeneous planar light UL 2-LED F 3W ww stainless steel





Description:
LED under cabinet luminaire with homogeneous planar light, housing stainless steel, supply cable 2,5m with LED 24 plug, colour appearance ww (warm white) approx. 3000K, optional accessories: dim controller with remote control, 1-10V, DALI or WiFi to switch and dim

Connection: LED-Trafo DC 24V
Light colour: 3000K Warm white
Beam angle: 110°
Symbols: IP20, SK III
Weight: 0,175 kg

Special features:
- housing of brushed stainless steel
- electronic contact switch EBS 4 as accessory
- no visible luminous spots

UL 2-LED F



110°	Ø	ww	nw
0,5m	620	320 lx	340 lx
1,0m	1240	80 lx	85 lx
1,5m	1860	36 lx	38 lx
2,0m	2480	20 lx	21 lx
2,5m	3100	13 lx	14 lx

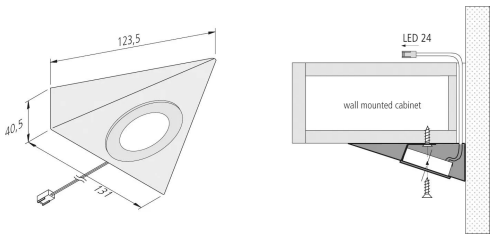

Order number:
61001461002

article in stock

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	Gehäusefarbe	light colour
61001461002	UL 2-LED F 3W ww stainless steel	Anodized aluminum	3000K Warm white
61001461003	UL 2-LED F 3W nw stainless steel	Anodized aluminum	4000K Neutral white
61055931102	set of 3 UL 2-LED F 3W ww stainless steel	Anodized aluminum	3000K Warm white
61055931103	set of 3 UL 2-LED F 3W nw stainless steel	Anodized aluminum	4000K Neutral white
61055931202	set of 3 UL 2-LED F 3W ww stainless steel with switch EBS	Anodized aluminum	3000K Warm white
61055931203	set of 3 UL 2-LED F 3W nw stainless steel with switch EBS	Anodized aluminum	4000K Neutral white

Order number: 61001461002

