
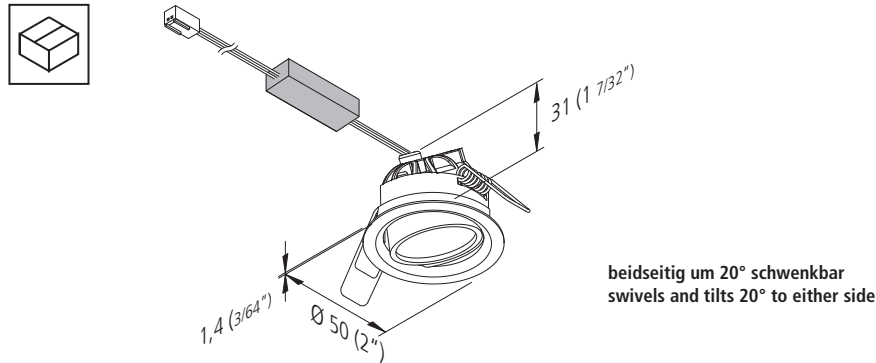


Montage- und Bedienungsanleitung

Hera LED Einbauleuchte Typ SR 45-24V

Bestimmungsgemäße Verwendung

Schwenkbare LED-Einbauleuchte. Beidseitig schwenkbar um 20°. Als Möbelleuchte zum Einbau in Möbel zugelassen. Nur für den Betrieb im Innenbereich geeignet.

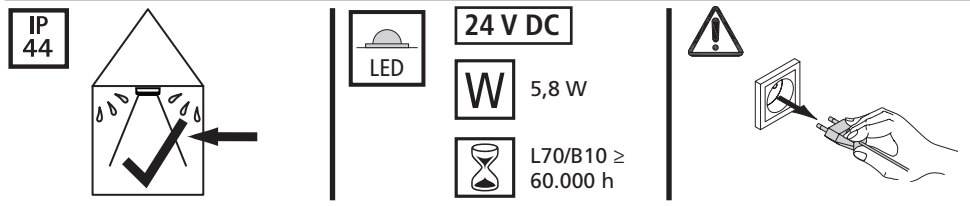

1. Beim Austausch von defekten Teilen dürfen nur Originalteile verwendet werden.
2. Alle Steckverbindungen immer bis zum Anschlag einführen.
3. Die Einbauabstände müssen eingehalten werden. Bei Nichtbeachtung besteht Überhitzungsgefahr.
4. Die Lichtquelle dieser Leuchte ist nicht ersetzbar; wenn die Lichtquelle ihr Lebensdauern erreicht hat, ist die gesamte Leuchte zu ersetzen.
5. Die Leuchte nicht demontieren da das Licht der Leuchtdioden das menschliche Auge verletzen kann.
6. Nur zum Anschluss an Hera LED Trafos 24 V mit einer Ausgangsleistung von max. 75 W zugelassen.
7. Werden andere als die angegebenen LED - Konverter eingesetzt, übernimmt Hera keine Gewährleistung.
8. Geeignet für folgende Hera Dimm-Controller und dimmbare Konverter:

Typ	Helligkeit
1-10V Controller 80W	15 - 100%
DALI-Controller	5 - 100%
Casambi-Controller	5 - 100%
ZigBee-Controller	5 - 100%
BLE-Controller	5 - 100%
Smart System	25 - 100%
Sonar Dimmer	10 - 100%
Primär Dimmbare Trafos 30 / 75W	ca. 35 - 100% abhängig vom angeschlossenen Dimmer



Entsorgen Sie elektrische Geräte nicht im Hausmüll, nutzen Sie die Sammelstellen in Ihrer Gemeinde. Wenn Sie das Gerät durch ein neues ersetzen, ist der Verkäufer gesetzlich verpflichtet, das alte mindestens kostenlos zur Entsorgung entgegenzunehmen.

Assembly and operating Instructions

Hera Recessed LED Luminaire

Type SR 45-24V

Intended use

Recessed Swivel and Tilt LED Luminaire. Swivels and tilts 20° to both sides. Approved as a furniture luminaire in accordance with UL 153 & UL 8750 for installation in furniture. This product is for indoor use only.

SAFETY INSTRUCTIONS

“CAUTION” To reduce the risk of fire, electric shock, or injury to persons:

1. Connect only to listed direct plug-in or cord connected Class 2 power supply with a constant output voltage of 24 V DC max. Only approved for connection to Hera LED transformers 24 V with a maximum output power of 75 W.
2. Use of power supply other than provided by Hera is not allowable and will void warranty.
3. Use only insulated staples or plastic ties to secure cords.
4. Route and secure cords so that they will not be pinched or damaged when cabinet is pushed to the wall.
5. This fixture has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reserve the plug. If it still does not fit, contact a qualified technician. Never use an extension cord unless the plug can be fully inserted. Do not alter the plug.
6. This portable cabinet light is not intended to allow bulb replacement. There are no user serviceable parts inside light. Do not disassemble the luminaire as the light diode can cause damage to the eyes. Faulty parts should only be replaced with original parts.
7. Not intended for recessed installation in ceilings or soffits.
8. Removal of cords or connectors may damage product and will void warranty.
9. Not intended for surface installation inside built-in furnishings such as kitchen cabinets, china cabinets, or trophy cases.
10. Suitable for Installation in Cabinets and Furnishings installed in Closets.
11. The National Electrical Code (NEC) does not permit cords to be concealed where damage to the insulation may go unnoticed. To prevent fire danger, do not run cords behind walls, ceilings, soffits, or cabinets where it may be inaccessible for examination. Cords should be visually examined periodically and immediately replaced when any damage is noted.
12. For best results, have lighting professionally installed by a qualified licensed electrician.
13. Do not exceed the maximum number of spotlights or damage to the driver may result.
14. The specified installation distances must be maintained. This warning must be observed to avoid the risk of overheating.
15. Always fully insert all plug connections.
16. The portable cabinet luminaire may be installed inside a kitchen cabinet or other built-in furnishing provided that the cabinet or built-in furnishing is provided with a dedicated receptacle and:
 - The Class 2 power supply is not concealed.
 - The line voltage power supply cord is not concealed or routed through openings in the cabinet or built-in furnishing.

Assembly and operating Instructions

Hera Recessed LED Luminaire

Type SR 45-24V

Intended use

Recessed Swivel and Tilt LED Luminaire. Swivels and tilts 20° to both sides. Approved as a furniture luminaire in accordance with UL 153 & UL 8750 for installation in furniture. This product is for indoor use only.

Suitable for the following Hera dimming controllers and dimmable converters:

Type	Brightness
1-10V Controller 80W	15 - 100%
DALI-Controller	5 - 100%
Casambi-Controller	5 - 100%
ZigBee-Controller	5 - 100%
BLE-Controller	5 - 100%
Smart System	25 - 100%
Sonar Dimmer	10 - 100%
Primary dimmable transformers 30 / 75W	approx. 35–100%, depending on the connected dimmer



Do not dispose of electrical appliances in household waste, use separate collection facilities. When replacing old appliances with new ones, the retailer is obliged by law to accept to take back your old appliance for disposal free of charge.

Reproduction of this document in whole or part is forbidden.

Explanation of the Symbols: <http://www.hera-online.de/en/technical-information.html>

Hera® Hera GmbH & Co. KG
Dieselstraße 9
32130 Enger / Germany

Nachdruck auch auszugsweise verboten.

Erklärung der Symbole: <http://www.hera-online.de/de/fachliches.html>

Hera® Hera GmbH & Co. KG
Dieselstraße 9
32130 Enger / Germany