

SlimLite® CS HE

Compact T5 aluminium fluorescent lamp SlimLite CS 259mm 6W




Description:

Very compact Linear luminaire, Small rigid connectors for minimum spacing between luminaires, vertical plug-in system allows later removal from the strip light, solid aluminium casing, easy mounting by enclosed clips, many accessories like reflector, screw-on bracket for Lichtvouten, plexiglass cover, horizontal or vertical connection line distributor and flush-type sockets with with small (7,5mm diameter) high-voltage plug-in system ready for connection with Tyco AMP, corner mounting clips 45° or angle mounting clips 90°

Connection: 220 - 240V / 50 - 60Hz
Energy efficiency: 96 - 104 lm/W (14 - 35 W)
Colour rendering: Ra/CRI >= 80
Symbols: CE, MM, IP20, SK II
EAN-No.: 4051268065221
Weight: 0,132 kg

Special features:

- Flicker-free instant start and power-saving due to electronic ballast
- ideal for food industry applications due to plexiglass cover (splinter shield)
- rigid connector for minimal spacing between luminaires
- vertical plug-in system allows later removal from the strip light
- many accessories
- from 8 W version „screw-through“

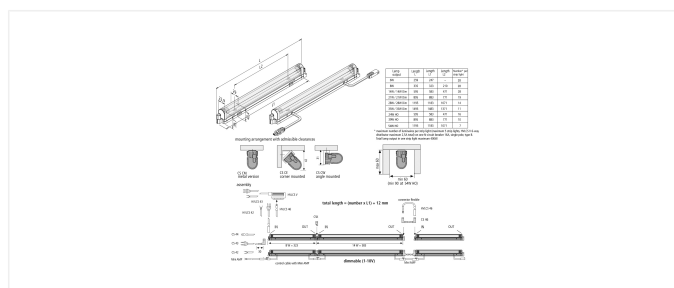

Order number:
50115010000

limited availability






available versions

Choose from the options below. The currently selected one is highlighted in color.


article number	description
50115010000	SlimLite CS 259mm 6W
50115020000	SlimLite CS 335mm 8W
50115030000	SlimLite CS 595mm 14W HE
50115040000	SlimLite CS 895mm 21W HE
50115050000	SlimLite CS 1195mm 28W HE
50115060000	SlimLite CS 1495mm 35W HE

Lamp output	Length L	Length L ₁	Length L ₂	Number* per strip light
6W	259	247	—	28
8W	335	323	210	28
14W / 14W Dim	595	583	471	28
21W / 21W Dim	895	883	771	19
28W / 28W Dim	1195	1183	1071	14
35W / 35W Dim	1495	1483	1371	11
24W HO	595	583	471	16
39W HO	895	883	771	10
54W HO	1195	1183	1071	7

* maximum number of luminaires per strip light (maximum 5 strip lights, HVLC5 V 6-way distributor maximum 2,5A total) on one N-circuit breaker 16A, single pole, type B. Total lamp output in one strip light maximum 400W.

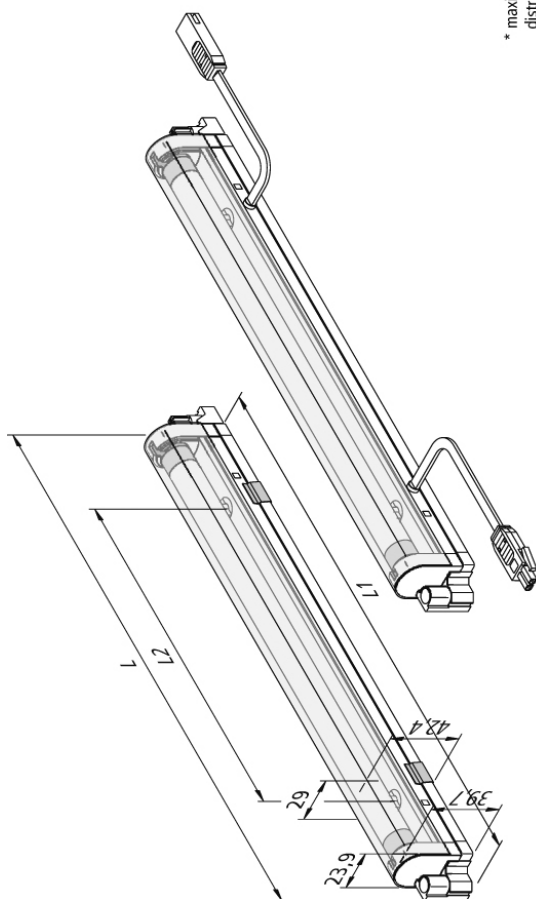

mounting arrangement with admissible clearances

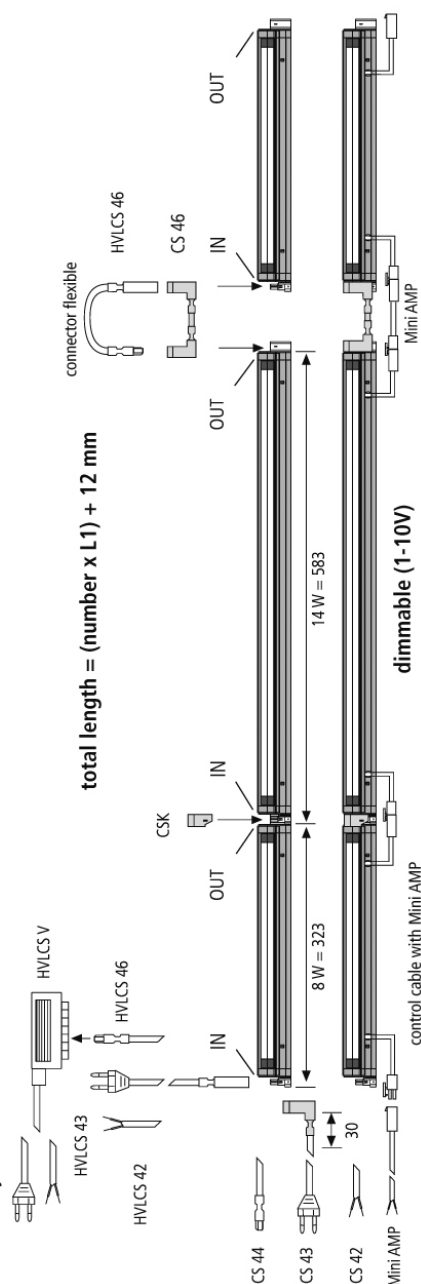

total length = (number x L1) + 12 mm

dimmmable (1-10V)