


Wall



230V flush-mounted wall recessed luminaire for 68mm hole LED Wall F 0,9W white RAL 9016

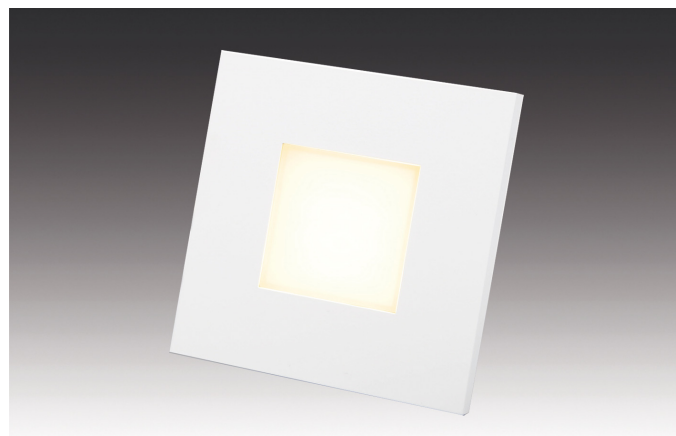

Description:

LED wall recessed luminaire, easy installation in standard surface pattress box and flush-mounted socket, direct connection to 230 V, no visible luminous spot

Connection: 220 - 240V / 50 - 60Hz
Life: L70/B10 >= 60.000 h
Light colour: 3000 K warm white
Beam angle: 120°
Energy efficiency: LED: 105 lm/W luminaire: 50 lm (55 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 80
Symbols: CE, MM, IP20, SK I
EAN-No.: 4051268198226
Weight: 0,065 kg


Special features:

- quick and easy installation due to standard surface pattress box and flush-mounted socket
- direct connection to 230 V
- no visible luminous spots
- NEW: versions "I" with integrated invisible motion detector (run-on time: 3 min.)

Drilling hole



68mm



Order number:
20202720201

article in stock

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing	energy efficiency
20202720201	LED Wall F 0,9W white RAL 9016	white	LED: 105 lm/W luminaire: 50 lm (55 lm/W)
20202720101	LED Wall F 1,8W white RAL 9016	white	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202720208	LED Wall F 0,9W stainless steel	stainless steel	LED: 105 lm/W luminaire: 50 lm (55 lm/W)
20202720108	LED Wall F 1,8W stainless steel	stainless steel	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202721101	LED Wall Up & Down 1,8W white RAL 9016	white	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202721108	LED Wall Up & Down 1,8W stainless steel	stainless steel	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202722101	LED Wall Down 1,8W white RAL 9016	white	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202722108	LED Wall Down 1,8W stainless steel	stainless steel	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202720103	LED Wall F 1,8W black	black	LED: 105 lm/W luminaire: 90 lm (50 lm/W)

