

## R 55



11mm flat, 55-58mm hole recessed furniture luminaire R 55-LED 3W ww matt chrome



### Description:

LED recessed spotlight, plastic housing, connecting cable 2,5 m with LED 24-plug, light color warm white approx. 3000 K, quick and easy installation in 55 or 58 holes, optional accessories: dimmable transformer with radio remote control or 1-10V dimmer

**Connection:** LED-Trafo DC 24 V  
**Life:** L70/B10 >= 40.000 h  
**Light colour:** 3000 K warm white  
**Beam angle:** 110°  
**Energy efficiency:** LED: 117 lm/W; luminaire: 220 lm (73 lm/W)  
**Energy efficiency class:** G  
**Colour rendering:** Ra/CRI >= 93  
**Symbols:** CE, MM, UL, IP44, SK III  
**EAN-No.:** 4051268110310  
**Weight:** 0,07 kg

### Special features:

- suitable for mounting in metal sheet


### R 55

|      | 110° | Ø ww / nw  |
|------|------|------------|
| 0,5m |      | 620 372 lx |
| 1,0m |      | 1240 93 lx |
| 1,5m |      | 1860 41 lx |
| 2,0m |      | 2480 23 lx |
| 2,5m |      | 3100 15 lx |

### Drilling hole



55-58mm




**Order number:**  
61001402006

limited availability

## available versions

Choose from the options below. The currently selected one is highlighted in color.

| article number | description                             | colour of housing | light colour         |
|----------------|-----------------------------------------|-------------------|----------------------|
| 61001402006    | R 55-LED 3W ww matt chrome              | matt chrome       | 3000 K warm white    |
| 61001402008    | R 55-LED 3W ww stainless steel          | stainless steel   | 3000 K warm white    |
| 61001403006    | R 55-LED 3W nw matt chrome              | matt chrome       | 4000 K neutral white |
| 61001403008    | R 55-LED 3W nw stainless steel          | stainless steel   | 4000 K neutral white |
| 61055503018    | set of 3 R 55-LED 3W ww stainless steel | stainless steel   | 3000 K warm white    |
| 61055513018    | set of 3 R 55-LED 3W nw stainless steel | stainless steel   | 4000 K neutral white |

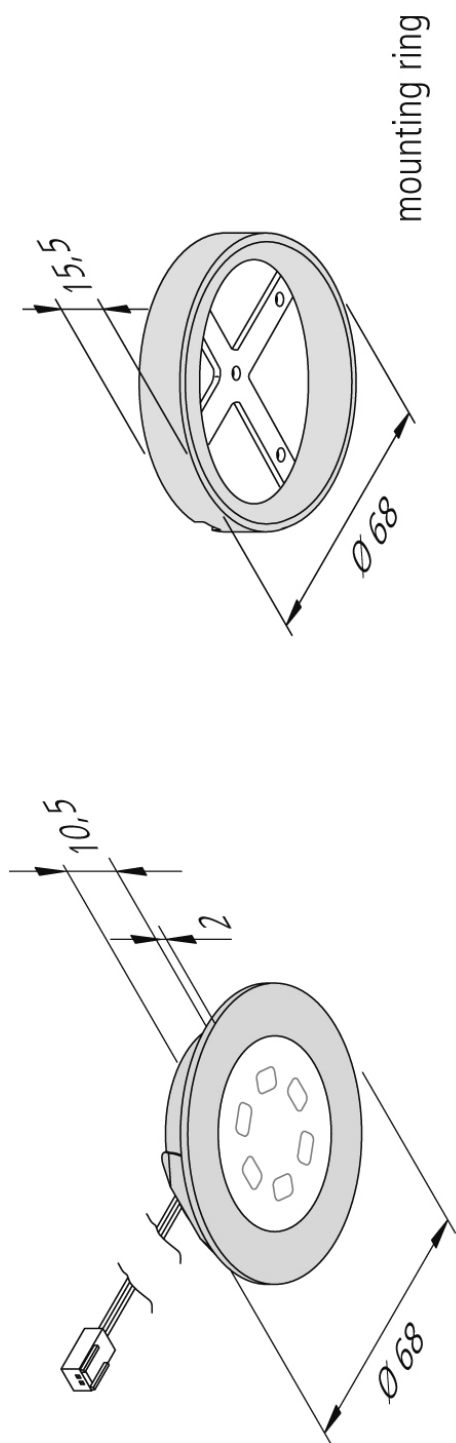

mounting ring

use spacer min. 50 mm at insulation

