


Dynamic FQ 68



Flat recessed luminaire square with adjustable colour appearance Dynamic FQ 68-LED 4W black

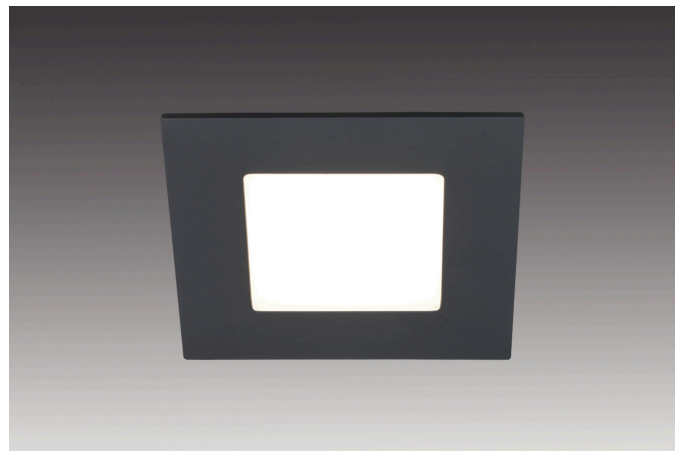

Description:

LED recessed spotlight with planar light, plastic housing, connecting cable 2.5m with dynamic plug, light color adjustable between approx. 2700K and 5000K, quick and easy installation with snap-in hooks, optional accessories: mounting spring for a secure hold in lightweight ceilings, surface-mounting ring for installation without mounting hole, control via radio remote control or WiFi controller

Connection: LED-Trafo DC 24 V
Life: L70/B10 >= 50.000 h
Light colour: 2700 – 5000 K (Dynamic) adjustable
Beam angle: 110°
Energy efficiency: LED: 113 lm/W; luminaire: 270 lm (68 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 93
Symbols: CE, MM, UL, IP44, SK III
EAN-No.: 4051268170574
Weight: 0,07 kg

Special features:

- flush mounting in 16 mm panels
- no visible luminous spots
- light colour adjustable between approx. 2700 K (xw) and 5000 K (cw)


Dynamic FR-/FQ 68

	110°	Ø	ww	nw	cw
0,5m		620	372 lx	400 lx	444 lx
1,0m		1240	93 lx	100 lx	111 lx
1,5m		1860	41 lx	44 lx	49 lx
2,0m		2480	23 lx	25 lx	28 lx
2,5m		3100	15 lx	16 lx	18 lx

Drilling hole



68mm



Order number:
61001660103

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing
61001660103	Dynamic FQ 68-LED 4W black	black
61001660106	Dynamic FQ 68-LED 4W matt chrome	matt chrome
61001660108	Dynamic FQ 68-LED 4W stainless steel	stainless steel
61057130108	set of 3 Dynamic FQ 68-LED 4W stainless steel	stainless steel

