


## AR 78

Powerful, flat aluminium recessed luminaire round AR 78-LED 7,5W ww white

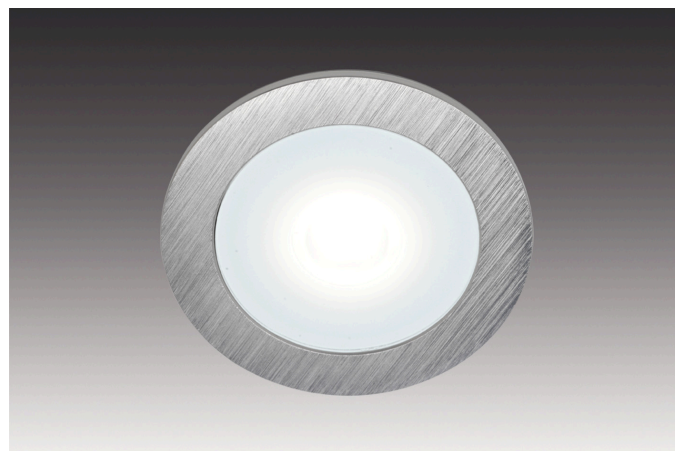

### Description:

LED recessed spotlight, aluminum housing, connecting cable 2.5m with LED 24-plug, light color warm white approx. 3000K, quick and easy installation with snap-in hooks, optional accessories: dimming controller with radio remote control, WiFi app, DALI or 1-10V dimmer, mounting spring for screwing on for secure hold in lightweight ceilings

**Connection:** LED-Trafo DC 24 V  
**Life:** L70/B10 >= 60.000 h  
**Light colour:** 3000 K warm white  
**Beam angle:** 80°  
**Energy efficiency:** LED: 90 lm/W; luminaire: 450 lm (60 lm/W)  
**Energy efficiency class:** G  
**Colour rendering:** Ra/CRI >= 98  
**Symbols:** CE, MM, UL, IP44, SK III  
**EAN-No.:** 4051268110914  
**Weight:** 0,115 kg

### Special features:

- flush mounting in 16 mm panels
- metal casing
- genuine glass cover
- with mounting spring also ideal for the use in plasterboard ceilings
- glare-free with recessed reflector and clear diffuser


### AR 78 / AQ 78

	80°	Ø	ww	nw
0,5m		500	888 lx	960 lx
1,0m		1000	222 lx	240 lx
1,5m		1500	99 lx	107 lx
2,0m		2000	56 lx	60 lx
2,5m		2500	36 lx	38 lx

### Drilling hole



78mm

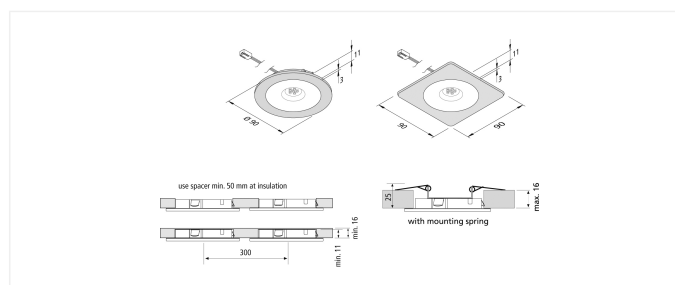

**Order number:**  
61001430201

article in stock

## available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing	light colour
61001430201	AR 78-LED 7,5W ww white	white	3000 K warm white
61001430203	AR 78-LED 7,5W ww black	black	3000 K warm white
61001430208	AR 78-LED 7,5W ww stainless steel look	stainless steel	3000 K warm white
61001430301	AR 78-LED 7,5W nw white	white	4000 K neutral white
61001430303	AR 78-LED 7,5W nw black	black	4000 K neutral white
61001430308	AR 78-LED 7,5W nw stainless steel look	stainless steel	4000 K neutral white

