

LED-2-Link Spot



Rotate and swivel aluminium showcase spotlight LED 2 Link Spot 1x 1,5W ww black



Description:

rotate and swivel LED Spot, combinable, metal housing, light appearance warm white approx. 3000K, feed-through wiring with LED 24 plug + LED 24 connector, optional accessories: various recessed and surface-mounted profiles as well as combinable with different kinds of luminaires, Dim-Controller with remote control, 1-10V, DALI, ZigBee, Sonar or WiFi



Connection: LED-Trafo DC 24 V
Life: L90/B10 >= 60.000 h
Light colour: 3000 K warm white
Beam angle: 38°
Energy efficiency: LED 110 lm/W; luminaire: 80 lm (53 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 90
Symbols: CE, MM, UL, IP20, SK III
EAN-No.: 4051268165570
Weight: 0,038 kg

Special features:

- 300° rotatable and swivelable by 300°
- max. 48 W per supply cable
- dimmable (only 1 controller per transformer)

LED-2-Link Spot

38°	Ø	ww	nw
0,5m	290	424 lx	520 lx
1,0m	580	106 lx	130 lx
1,5m	870	47 lx	58 lx
2,0m	1160	27 lx	33 lx
2,5m	1450	17 lx	21 lx




Order number:
61002130302

article in stock


available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing	light colour
61002130302	LED 2 Link Spot 1x 1,5W ww black	black	3000 K warm white
61002130102	LED 2 Link Spot 1x 1,5W ww anodized aluminium	anodized aluminium	3000 K warm white
61002130303	LED 2 Link Spot 1x 1,5W nw black	black	4000 K neutral white
61002130103	LED 2 Link Spot 1x 1,5W nw anodized aluminium	anodized aluminium	4000 K neutral white
61002133302	LED 2 Link Spot 3x 1,5W ww black	black	3000 K warm white
61002133102	LED 2 Link Spot 3x 1,5W ww anodized aluminium	anodized aluminium	3000 K warm white
61002133303	LED 2 Link Spot 3x 1,5W nw black	black	4000 K neutral white
61002133103	LED 2 Link Spot 3x 1,5W nw anodized aluminium	anodized aluminium	4000 K neutral white

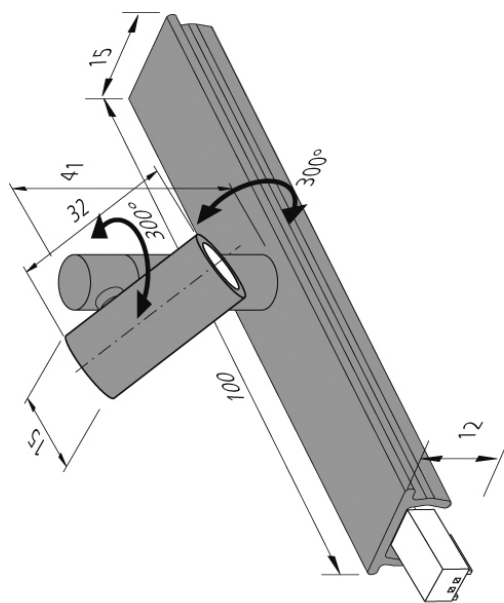

LED 24

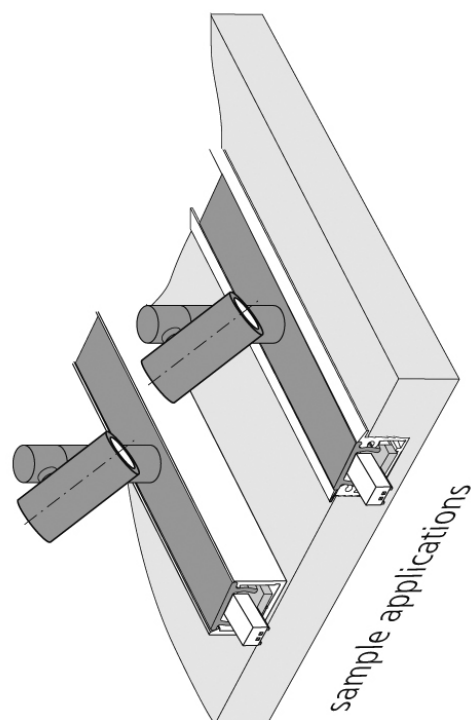

sample applications