


Q 68



Flat recessed luminaire square Q 68-LED 2,5W ww stainless steel

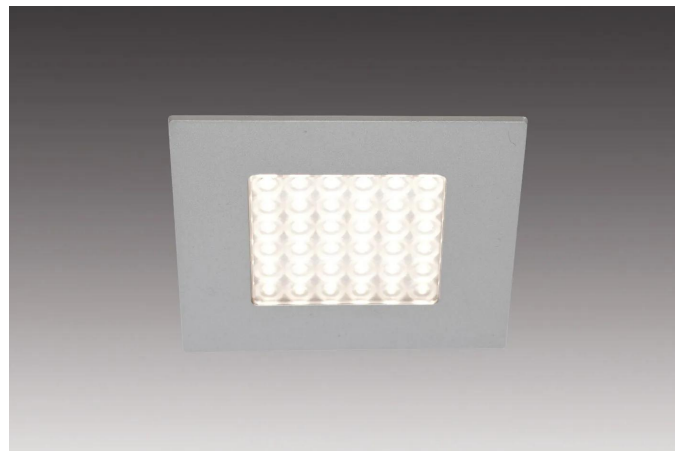

Description:

Square recessed LED spotlight for 68mm bore, plastic housing, connecting cable 2.5m with LED 24-plug, light color warm white approx. 3000K, quick and easy installation with snap-in hooks, optional accessories: dimmable transformer with remote control or 1-10V dimmer, mounting spring for a secure hold in lightweight ceilings, surface-mounting ring for installation without mounting hole

Connection: LED-Trafo DC 24V
Life: L70/B10 >= 60.000h
Light colour: 3000K warm white
Beam angle: 53°
Energy efficiency: LED: 98 lm/W, luminaire: 185 lm (74 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 93
Symbols: CE, MM, IP44, SK III
EAN-No.: 4,05E+12
Weight: 0,085 kg

Special features:

- flush mounting in 16mm panels


R 68 / Q 68

53°	Ø	ww	nw
0,5m	420	652 lx	752 lx
1,0m	840	163 lx	188 lx
1,5m	1260	72 lx	84 lx
2,0m	1680	41 lx	47 lx
2,5m	2100	26 lx	30 lx

Drilling hole



68mm



Order number:
61001262208

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description
61001262208	Q 68-LED 2,5W ww stainless steel

