

Dynamic IN-Stick SF



Lean recessed LED luminaire with adjustable colour appearance Dynamic LED IN-Stick SF 830mm 13,6W



Description:

Schlanke LED-Recessed light with uniform Area light for Milled groove 20 mm wide and 12 mm deep, Aluminium housing, Connection cable 2,5 m with Dynamic plug, Light colour adjustable between approx. 2700 K and 5000 K, required Accessories: Dynamic Controller with Wireless remote control, DALI or WiFi App for Dim and Adjust the Light colour.

Connection: LED-Trafo DC 24V

Light colour: 2700 - 5000K (Dynamic) adjustable

Beam angle: 100°

Energy efficiency: LED: 129 lm/W; Leuchte: 651 lm/m (40 lm/W)

Symbols: IP44, SK III


Weight: 0,21 kg

Special features:

- No visible points of light
- Light colour: 2700 - 5000 K (Dynamic) adjustable
- Connection cable 2,5 m with Dynamic plug
- Anodised aluminium
- For Milled groove 12 x 20 mm
- Further versions available from 1 unit
- Design: Linear-Light
- LED Transformer DC 24 V
- Connector system: Dynamic
- Protection rating: IP44
- Dimmable with compatible control

Dynamic IN-Stick SF

	100°	Ø	xw	nw	cw
0,5m		1192	1184 lx	1288 lx	1356 lx
1,0m		2384	296 lx	322 lx	339 lx
1,5m		3575	132 lx	143 lx	151 lx
2,0m		4767	74 lx	81 lx	85 lx
2,5m		5959	47 lx	52 lx	54 lx

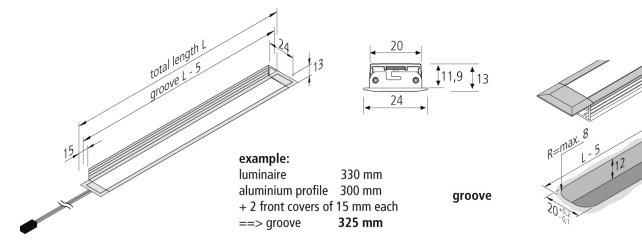

Order number:
61001830301

limited availability




available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description
61001830101	Dynamic LED IN-Stick SF 330mm 5,2W
61001830201	Dynamic LED IN-Stick SF 530mm 8,6W
61001830301	Dynamic LED IN-Stick SF 830mm 13,6W
61001830401	Dynamic LED IN-Stick SF 1130mm 18,4W

Order number: 61001830301

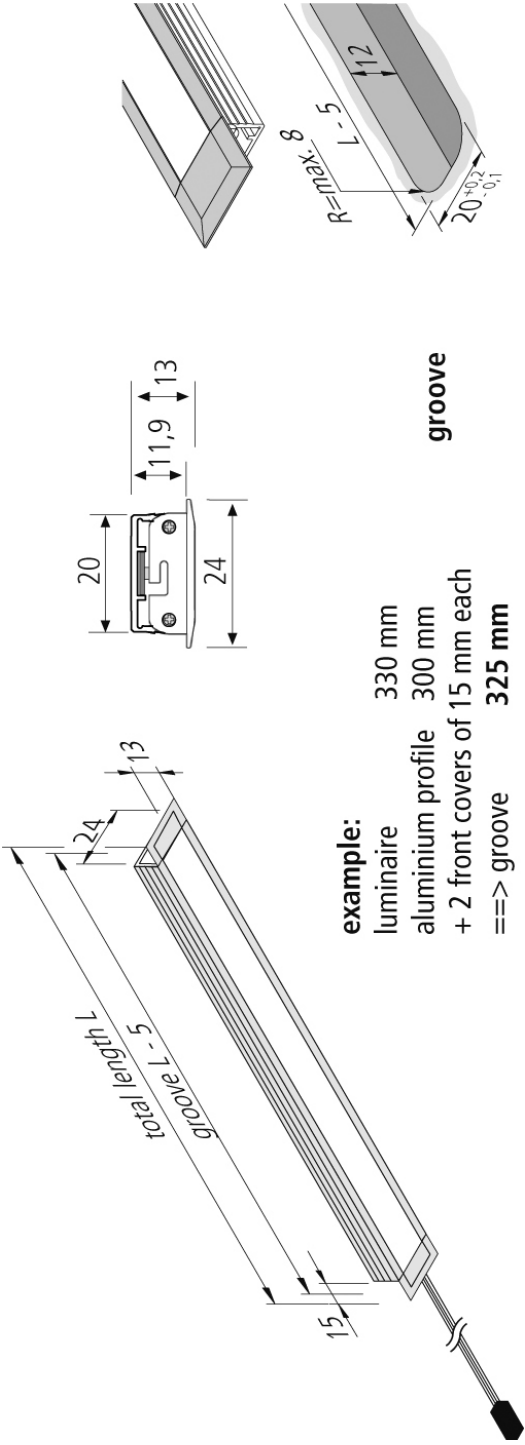

example:
luminaire 330 mm
aluminium profile 300 mm
+ 2 front covers of 15 mm each
==> groove 325 mm