

Pipe F



Rotating LED linear luminaire with homogeneous planar light LED Pipe F 1210mm 22,3W nw



Description:

Rotatable, round LED-Surface-mounted light with uniform Area light, Aluminium housing, Connection cable 25 mm with LED 24 plug and Interconnection cable 25 mm with LED 24 socket, easy Installation using included Screws, light colour neutral white approx. 4000 K, optional accessories: Magnetic holder for Sheet-metal installation, Dimming controller with Wireless remote control, DALI or 1-10 V Dimming controller with Wireless remote control, DALI or 1-10 V.

Connection: LED-Trafo DC 24V

Light colour: 4000K Neutral white

Beam angle: 120°

Energy efficiency: LED: 107 lm/W; Leuchte: 1100 lm/m (51 lm/W)

Symbols: IP20, SK III


Weight: 0,28 kg

Special features:

- LEDs rotatable by 360°
- Installation with Screws in Wood or with Magnetic holder as Accessories
- No visible points of light
- Light colour: 4000 K neutral white
- Connection cable 2,5 m with LED 24 plug
- Design: Linear-Light
- LED Transformer DC 24 V
- Connector system: LED 24
- Protection rating: IP20
- Dimmable with compatible control
- Adjustable version
- Max. power: 60 W per connection cable

Pipe F

	120°	Ø	ww	nw
0,5m		1732	1324 lx	1360 lx
1,0m		3464	331 lx	340 lx
1,5m		5196	147 lx	151 lx
2,0m		6928	83 lx	85 lx
2,5m		8660	53 lx	54 lx

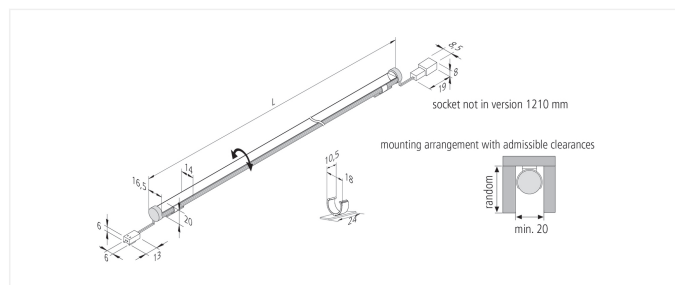

Order number:
61001611403

limited availability



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	light colour
61001610102	LED Pipe F 310mm 5,8W ww	3000K Warm white
61001610103	LED Pipe F 310mm 5,8W nw	4000K Neutral white
61001610202	LED Pipe F 610mm 11,4W ww	3000K Warm white
61001610203	LED Pipe F 610mm 11,4W nw	4000K Neutral white
61001610302	LED Pipe F 910mm 17,0W ww	3000K Warm white
61001610303	LED Pipe F 910mm 17,0W nw	4000K Neutral white
61001611402	LED Pipe F 1210mm 22,3W ww	3000K Warm white
61001611403	LED Pipe F 1210mm 22,3W nw	4000K Neutral white

