# Tape L

IP 54 | LED 24 | configurator

Self-adhesive, flexible LED strips with lens on a roll  LED Tape L 35° 5m 210 LED 80W nw






**Description:**
Flexible LED strip with 35° Lens on Reel, light colour neutral white approx. 4000 K, Quick and easy installation using the pre-applied double-sided 3M adhesive tape, incl. Connection cable 2,5 m with LED 24 plug, the strip can be cut every 167 mm (see marking), optional accessories: Dimming controller with Wireless remote control, 1-10 V, DALI, ZigBee, Sonar or WiFi Control.

| | |
|---|---|
| **Connection:** | LED-Trafo DC 24V |
| **Light colour:** | 4000K Neutral white |
| **Beam angle:** | 38° |
| **Energy efficiency:** | LED: 130 lm/W; Leuchte: 1600 lm/m (100 lm/W) |
| **Energy efficiency class:** | F |
| **Symbols:** | IP54, SK III |
| **Weight:** | 0,85 kg |

**Special features:**

- Quick and easy installation using double-sided adhesive tape
- Strip all 167 mm can be shortened
- Minimum Bending radius 150 mm
- Thanks to IP54, ideally suited for applications requiring increased protection (general Moisture, Bathroom- and Kitchen area, Fresh-food area, Shopfitting)
- Schmaler Beam angle 35° for lateral Hinterleuchtung of Bannern and Grafiken
- Incl. Connection cable 2,5 m with LED 24 plug
- Light colour: 4000 K neutral white
- With Silicone-Encapsulation compound (IP 54)
- Design: Flexible LED strip
- LED Transformer DC 24 V
- Connector system: LED 24
- Protection rating: IP54
- Dimmable with compatible control
- The strips cannot be reconnected afterwards

Tape L

| 38° | Ø | nw |
|---|---|---|
| 0,5m | 344 | 7312 lx |
| 1,0m | 689 | 1828 lx |
| 1,5m | 1033 | 812 lx |
| 2,0m | 1377 | 457 lx |
| 2,5m | 1722 | 292 lx |

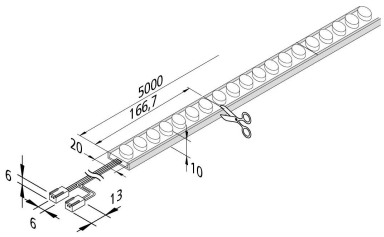


**Order number:**
20203200103

article in stock

HERA LED WARRANTY 5 YEARS

## available versions

Choose from the options below. The currently selected one is highlighted in color.

| article number | description | Gehäusefarbe |
|---|---|---|
| 20203200103 | LED Tape L 35° 5m 210 LED 80W nw | N/A |

Order number: 20203200103

