


AR 78 / AQ 78



High-output, Flat aluminium recessed light round AR 78-LED 7,5W nw white

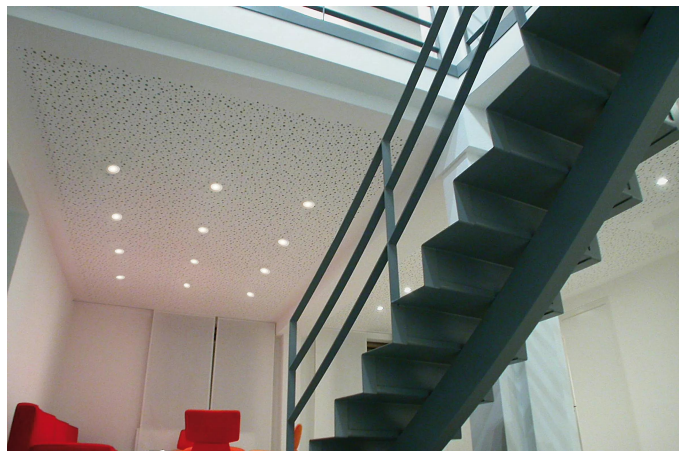

Description:

LED-Recessed spotlight, Housing Aluminium, Connection cable 2,5 m with LED 24 plug, light colour neutral white approx. 4000 K, Quick and easy installation using Snap hooks, optional accessories: Dimming controller with Wireless remote control, WiFi App, DALI or 1-10 V Dimmer, Screw-on mounting spring for secure support in lightweight ceilings.

Connection: LED-Trafo DC 24V

Light colour: 4000K Neutral white

Beam angle: 117°

Energy efficiency: LED: 90 lm/W; Leuchte: 450 lm/m (60 lm/W)

Symbols: IP44, SK III

Weight: 0,12 kg

Special features:

- Flush installation in 16 mm panels
- Metal housing
- Real-glass cover
- The optionally available mounting spring also makes the product ideal for installation in lightweight ceilings
- Glare-free with recessed Reflector and clear Cover
- Light colour: 4000 K neutral white
- Connection cable 2,5 m with LED 24 plug
- Design: Wide-beam spotlight >80°
- LED Transformer DC 24 V
- Connector system: LED 24
- Protection rating: IP44 [with Blind hole]
- Dimmable with compatible control
- Housing colour: White


AR 78

	117°	Ø	ww	nw
0,5m		1632	888 lx	960 lx
1,0m		3264	222 lx	240 lx
1,5m		4896	99 lx	107 lx
2,0m		6527	56 lx	60 lx
2,5m		8159	36 lx	38 lx

Drilling hole



78mm

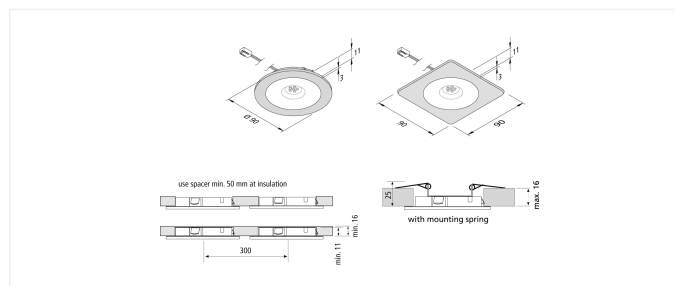

Order number:
61001430301





limited availability



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	light colour
61001430201	AR 78-LED 7,5W ww white	3000K Warm white
61001430203	AR 78-LED 7,5W ww black	3000K Warm white
61001430208	AR 78-LED 7,5W ww stainless-steel look	3000K Warm white
61001430301	AR 78-LED 7,5W nw white	4000K Neutral white
61001430303	AR 78-LED 7,5W nw black	4000K Neutral white
61001430308	AR 78-LED 7,5W nw stainless-steel look	4000K Neutral white

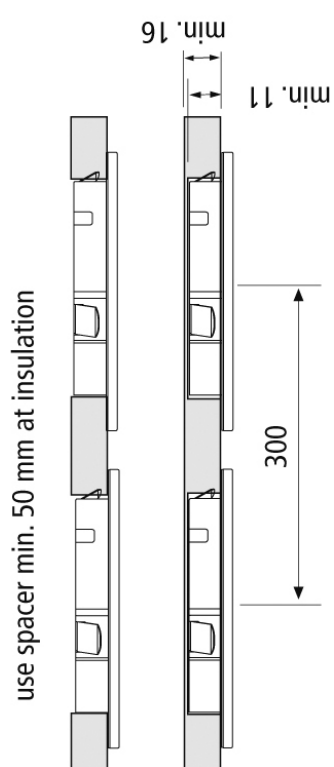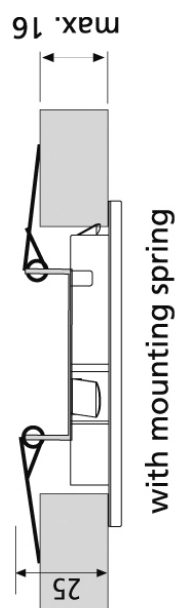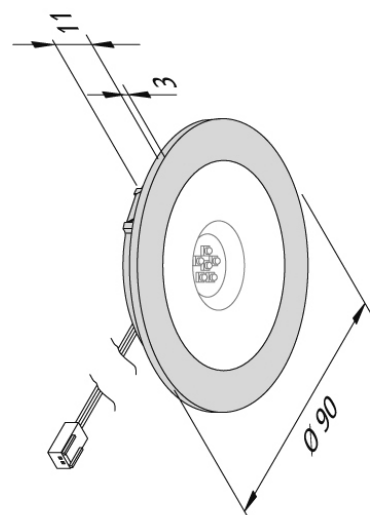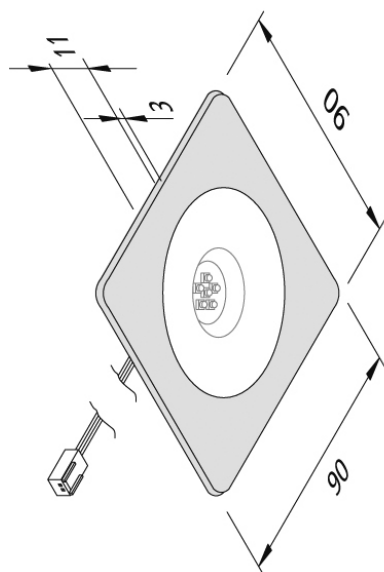

use spacer min. 50 mm at insulation