

Eco SR 68



Swivelling recessed ceiling spotlight for 68–80 mm ceiling cut-outs Eco SR 68-LED 6.5W xw white



Description:

Pivotable LED-Recessed spotlight, Metal housing, incl. dimmable LED Transformer with Connection terminal for 230 V with integrated through-wiring, Quick and easy installation using Spring terminals, pivotable by per 20°. Light colour: 2700 K extra warm white. Incl. small Transformer for the Slim Suspended ceiling.

Connection: LED-Trafo DC 280mA

Light colour: 2700K Extra warm white

Beam angle: 29°

Energy efficiency: LED: 135 lm/W; Leuchte: 750 lm/m (116 lm/W)

Symbols: IP20, SK III

Weight: 0,19 kg

Special features:

- Pivotable by 20°
- Metal housing
- Incl. small Transformer for the Slim Suspended ceiling
- Light colour: 2700 K extra warm white
- Incl. dimmable LED Transformer with Connection terminal for 230 V with integrated through-wiring
- Recommended Phases-Dimmer: Busch 2247U or 6513U-102, Jung 1731DD or 1711DE, GIRA 117600/103
- Design: Spot 760°
- LED Transformer DC 280 mA
- Protection rating: IP20
- Dimmable with compatible control
- Adjustable version
- Housing colour: White


Eco SR 68 6,5W

	29°	Ø	xw	ww	nw
0,5m		259	5152 lx	5104 lx	5292 lx
1,0m		517	1288 lx	1276 lx	1323 lx
1,5m		776	572 lx	567 lx	588 lx
2,0m		1034	322 lx	319 lx	331 lx
2,5m		1293	206 lx	204 lx	212 lx

Drilling hole



68mm

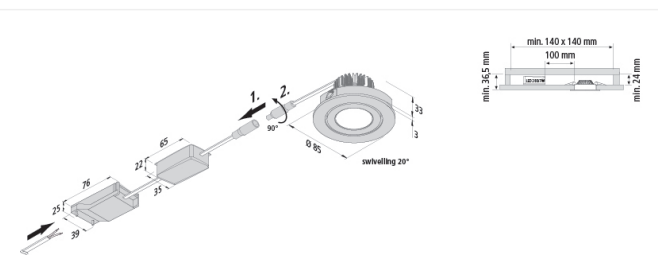

Order number:
20203351004

limited availability



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	light colour
20203351004	Eco SR 68-LED 6.5W xw white	2700K Extra warm white
20203356004	Eco SR 68-LED 6.5W xw matt chrome	2700K Extra warm white
20203351002	Eco SR 68-LED 6.5W ww white	3000K Warm white
20203356002	Eco SR 68-LED 6.5W ww matt chrome	3000K Warm white
20203351003	Eco SR 68-LED 6.5W nw white	4000K Neutral white
20203356003	Eco SR 68-LED 6.5W nw matt chrome	4000K Neutral white

