

FAQ 58



Flat recessed LED luminaire with homogeneous planar light FAQ 58-LED 3W ww black



Description:

LED-Recessed spotlight with Area light, Housing Metal, Connection cable 2,5 m with LED 24 plug on the Spotlight pluggable, light colour warm white approx. 3000 K, Quick and easy installation using Snap hooks, optional accessories: Dimming controller with Wireless remote control, Alexa, WiFi, DALI, ZigBee, Casambi, Sonar or 1-10 V Dimmer.

Connection: LED-Trafo DC 24V

Light colour: 3000K Warm white

Beam angle: 115°

Energy efficiency: LED: 120 lm/W; Leuchte: 225 lm/m (75 lm/W)

Symbols: IP44, SK III

Weight: 0,08 kg

Special features:

- o Metal housing
- o Flush installation in 16 mm panels
- o No visible points of light
- o Light colour: 3000 K warm white
- o Connection cable pluggable 2,5 m with LED 24 plug
- o Design: Wide-beam spotlight >80°
- o LED Transformer DC 24 V
- o Connector system: LED 24
- o Protection rating: IP44 [with Blind hole]
- o Dimmable with compatible control
- o Housing colour: Black


FAQ 58

	115°	Ø	ww	nw
0,5m		1570	360 lx	376 lx
1,0m		3139	90 lx	94 lx
1,5m		4709	40 lx	42 lx
2,0m		6279	23 lx	24 lx
2,5m		7848	14 lx	15 lx

Drilling hole



58mm



Order number:
20203153002


limited availability



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	light colour
20203153002	FAQ 58-LED 3W ww black	3000K Warm white
20203158002	FAQ 58-LED 3W ww stainless-steel look	3000K Warm white
20203153003	FAQ 58-LED 3W nw black	4000K Neutral white
20203158003	FAQ 58-LED 3W nw stainless-steel look	4000K Neutral white
61060431302	Set of 3 FAQ 58-LED 3W ww black	3000K Warm white
61060431002	3er Set FAQ 58-LED 3W ww stainless-steel look	3000K Warm white
61060431003	3er Set FAQ 58-LED 3W nw stainless-steel look	4000K Neutral white
61060451302	Set of 5 FAQ 58-LED 3W ww black	3000K Warm white
61060451002	5er Set FAQ 58-LED 3W ww stainless-steel look	3000K Warm white
61060451003	5er Set FAQ 58-LED 3W nw stainless-steel look	4000K Neutral white

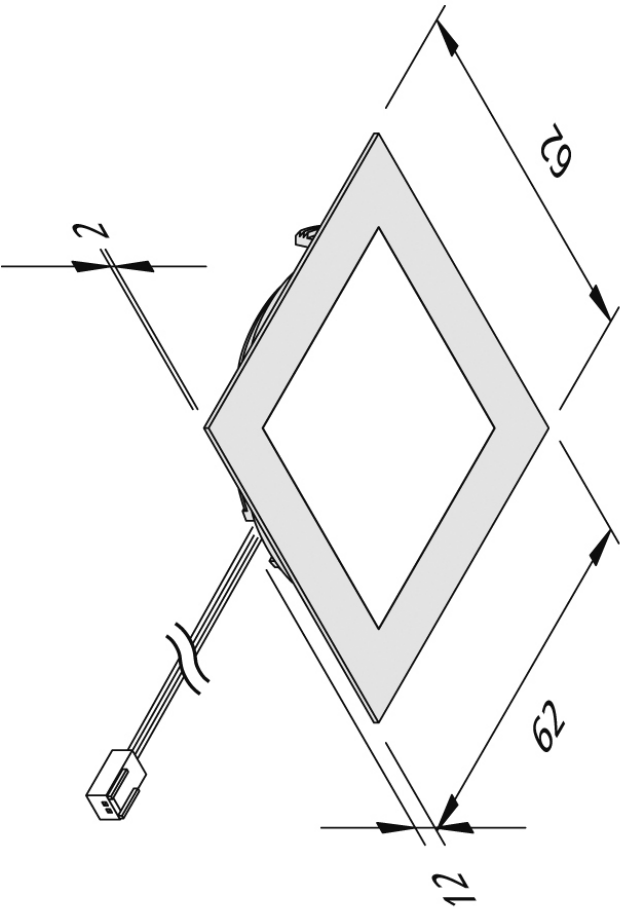

use spacer min. 50 mm at insulation

