


SR 68 4.8W



Swivelling recessed ceiling spotlight for 68–80 mm ceiling cut-outs SR 68-LED 4,8W 35° ww stainless-steel look

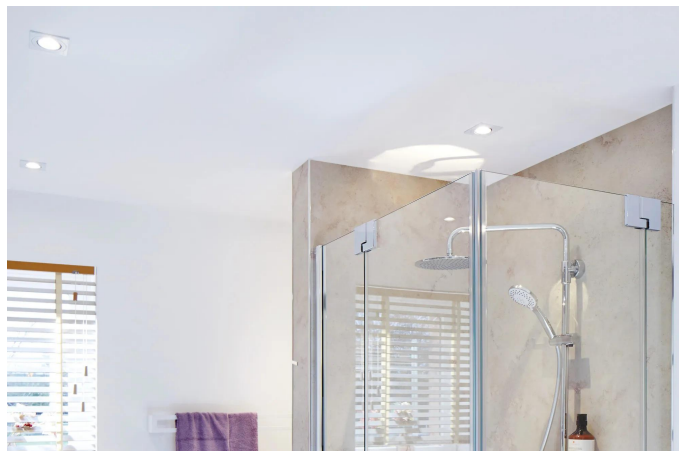

Description:

Pivotable LED-Recessed spotlight, Metal housing, Connection cable 0,2 m with LED 350-Plug, Quick and easy installation using Spring terminals, optional accessories: dimmable Transformer for Phase-cut dimmer or 1-10 V Dimmer, light colour warm white approx. 3000 K, gimbal-mounted pivotable by per 20°. Suitable for display screen workstations! (UGR<19).

Connection: LED-Trafo DC 350mA

Light colour: 3000K Warm white

Beam angle: 35°

Energy efficiency: LED: 120 lm/W; Leuchte: 485 lm/m (100 lm/W)

Symbols: IP44, SK III

Weight: 0,11 kg

Special features:

- Gimbal-mounted pivotable by 20°
- Metal housing
- Suitable for display screen workstations! (UGR<19)
- Light colour: 3000 K warm white
- Connection cable 0,2 m with LED 350-Plug
- Beam angle 22° or 35°
- Design: Spot 760°
- LED Transformer DC 350 mA
- Connector system: LED 350
- Protection rating: IP44
- Dimmable with compatible control
- Adjustable version
- Housing colour: Stainless-steel look


SR 68 4,8W

35°	Ø	xw	ww	nw
0,5m	280	3650 lx	3880 lx	4216 lx
1,0m	560	912 lx	970 lx	1054 lx
1,5m	840	406 lx	431 lx	468 lx
2,0m	1120	228 lx	243 lx	264 lx
2,5m	1400	146 lx	155 lx	169 lx

Drilling hole



68-74mm (ohne Ring)
68-84mm (mit Ring)

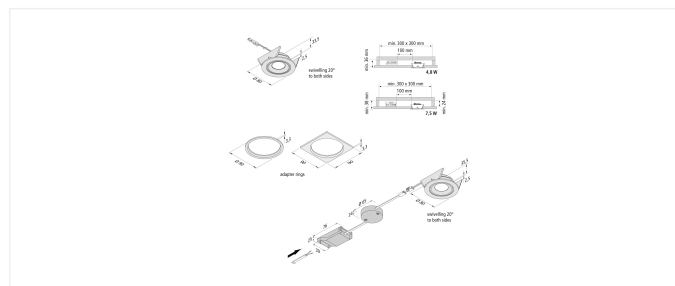

Order number:
20202401801

article in stock



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	shielding angle	light colour
20202401701	SR 68-LED 4,8W 35° xw white	35°	2700K Extra warm white
20202401001	SR 68-LED 4,8W 35° xw black	35°	2700K Extra warm white
20202401401	SR 68-LED 4,8W 35° xw matt chrome	35°	2700K Extra warm white
20202402001	SR 68-LED 4,8W 35° xw stainless-steel look	35°	2700K Extra warm white
20202400201	SR 68-LED 4,8W 22° ww matt chrome	22°	3000K Warm white
20202401501	SR 68-LED 4,8W 35° ww white	35°	3000K Warm white
20202400801	SR 68-LED 4,8W 35° ww black	35°	3000K Warm white
20202401201	SR 68-LED 4,8W 35° ww matt chrome	35°	3000K Warm white
20202401801	SR 68-LED 4,8W 35° ww stainless-steel look	35°	3000K Warm white
20202400301	SR 68-LED 4,8W 22° nw matt chrome	22°	4000K Neutral white
20202401601	SR 68-LED 4,8W 35° nw white	35°	4000K Neutral white
20202401301	SR 68-LED 4,8W 35° nw matt chrome	35°	4000K Neutral white
20202401901	SR 68-LED 4,8W 35° nw stainless-steel look	35°	4000K Neutral white

