


Dynamic FQ 68



LED recessed light with area lighting and adjustable light colour Dynamic FQ 68-LED 4W black

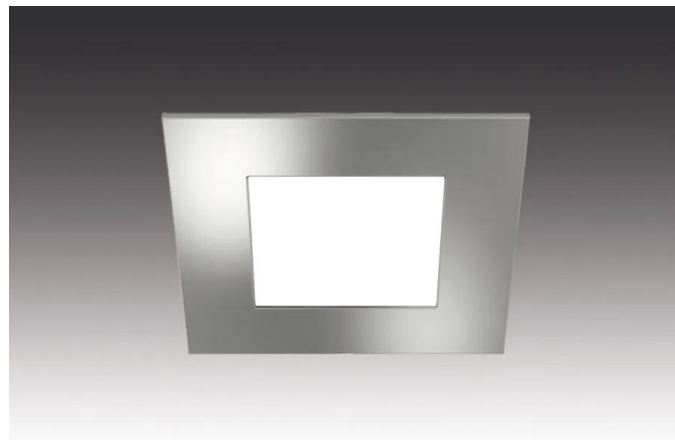

Description:

LED-Recessed spotlight with Area light, Plastic housing, Connection cable 2,5 m with Dynamic plug, Light colour adjustable between approx. 2700 K and 5000 K, Quick and easy installation using Snap hooks, optional accessories: Screw-on mounting spring for secure support in lightweight ceilings, Mounting ring for installation without a recessed hole, Control via Wireless-Remote control or WiFi-Controller.

Connection: LED-Trafo DC 24V

Light colour: 2700 - 5000K (Dynamic) adjustable

Beam angle: 110°

Energy efficiency: LED: 113 lm/W; Leuchte: 270 lm/m (68 lm/W)

Symbols: IP44, SK III

Weight: 0,07 kg

Special features:

- Flush installation in 16 mm panels
- No visible points of light
- Light colour: 2700 - 5000 K (Dynamic) adjustable
- Connection cable 2,5 m with Dynamic plug
- Design: Wide-beam spotlight >80°
- LED Transformer DC 24 V
- Connector system: Dynamic
- Protection rating: IP44 [with Blind hole]
- Dimmable with compatible control
- Housing colour: Black


Dynamic FQ 68

	110°	Ø	ww	nw	cw
0,5m		620	372 lx	400 lx	444 lx
1,0m		1240	93 lx	100 lx	111 lx
1,5m		1860	41 lx	44 lx	49 lx
2,0m		2480	23 lx	25 lx	28 lx
2,5m		3100	15 lx	16 lx	18 lx

Drilling hole



68mm



Order number:
61001660103

limited availability



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description
61001660103	Dynamic FQ 68-LED 4W black
61001660106	Dynamic FQ 68-LED 4W matt chrome
61001660108	Dynamic FQ 68-LED 4W stainless-steel look
61057130108	3er Set Dynamic FQ 68-LED 4W stainless-steel look

