


Dynamic SR 68



Swivelling LED recessed light with adjustable light colour Dynamic SR 68-LED 6,5W white

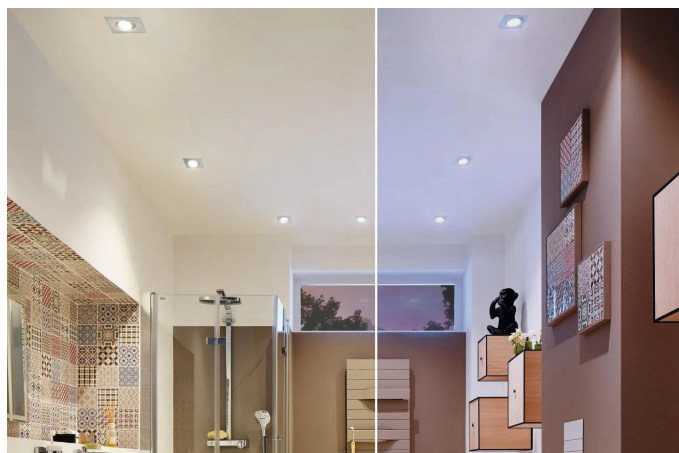

Description:

Pivotable LED-Recessed spotlight, Metal housing, Connection cable 2,5 m with Dynamic plug, Light colour adjustable between approx. 2700 K and 5000 K, Quick and easy installation using Spring terminals, Control via various Wireless-Remote controls, DALI or WiFi-Controller. Suitable for display screen workstations! (UGR<19).

Connection: LED-Trafo DC 24V

Light colour: 2700 - 5000K (Dynamic) adjustable

Beam angle: 42°

Energy efficiency: LED: 105 lm/W; Leuchte: 420 lm/m (65 lm/W)

Symbols: IP44, SK III

Weight: 0,15 kg

Special features:

- Gimbal-mounted pivotable by 20°
- Metal housing
- Light colour: 2700 - 5000 K (Dynamic) adjustable
- Suitable for display screen workstations! (UGR<19)
- Connection cable 2,5 m with Dynamic plug
- Design: Spot 760°
- LED Transformer DC 24 V
- Connector system: Dynamic
- Protection rating: IP44
- Dimmable with compatible control
- Adjustable version
- Housing colour: White



Dynamic SR 68

42°	Ø	xw	nw	cw
0,5m	384	2744 lx	3160 lx	3128 lx
1,0m	768	686 lx	790 lx	782 lx
1,5m	1152	305 lx	351 lx	348 lx
2,0m	1535	172 lx	198 lx	196 lx
2,5m	1919	110 lx	126 lx	125 lx

Drilling hole



68-74mm (ohne Ring)
68-84mm (mit Ring)



Order number:
20202750101

article in stock



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description
20202750101	Dynamic SR 68-LED 6,5W white
20202750106	Dynamic SR 68-LED 6,5W matt chrome
20202750108	Dynamic SR 68-LED 6,5W stainless-steel look

