

LED Track 24V

IP
20

LED-2-Link display-case profile LED-2-Link holding arm 300mm with supply cable 2,5m max. 48W



Description:

LED-2-Link Haltearm 300 mm With connection cable 2,5 m max. 48 W for electrical Connection compatible Components of the LED-2-Link-Systems.

Connection: N/A

Light colour: 3000K Warm white

Symbols: IP20

Weight: 0,07 kg

Special features:


- For Connection compatible Components in the LED-2-Link-System
- Housing colour: Stainless-steel look
- Protection rating: IP20
- Height to 300 mm continuously adjustable



Drilling hole



28mm



Order number:
61500032911

limited availability




available versions



Choose from the options below. The currently selected one is highlighted in color.

article number	description	safety class	connection system	metal housing	protection class	drilling diameter	connection	light colour	shielding angle	energy efficiency
20202560302	LED Track Point S 1,5W ww black	IP20	LED 24	No	SK3	20mm	LED-Trafo DC 24V	3000K Warm white	10° - 30°	LED: 88 lm/W; Leuchte: 80 lm/m (53 lm/W)
20202560702	LED Track Point S 1,5W ww anodised aluminium	IP20	LED 24	No	SK3	20mm	LED-Trafo DC 24V	3000K Warm white	10° - 30°	LED: 88 lm/W; Leuchte: 80 lm/m (53 lm/W)
20202560303	LED Track Point S 1,5W nw black	IP20	LED 24	No	SK3	20mm	LED-Trafo DC 24V	4000K Neutral white	10° - 30°	LED: 88 lm/W; Leuchte: 80 lm/m (53 lm/W)
20202560703	LED Track Point S 1,5W nw anodised aluminium	IP20	LED 24	No	SK3	20mm	LED-Trafo DC 24V	4000K Neutral white	10° - 30°	LED: 88 lm/W; Leuchte: 80 lm/m (53 lm/W)
20202560301	LED Track Point S 1,5W cw black	IP20	LED 24	No	SK3	20mm	LED-Trafo DC 24V	5000K Cool white	10° - 30°	LED: 88 lm/W; Leuchte: 80 lm/m (53 lm/W)
20202560701	LED Track Point S 1,5W cw anodised aluminium	IP20	LED 24	No	SK3	20mm	LED-Trafo DC 24V	5000K Cool white	10° - 30°	LED: 88 lm/W; Leuchte: 80 lm/m (53 lm/W)
LED-2-Link - Vitrinprofil		N/A	-	No	N/A	-	-	N/A	-	-
61500032703	LED Display-case profile 1m	N/A	N/A	Yes	N/A	28mm	N/A	N/A	-	-
61500032763	LED Display-case profile 2,95m 5er Set	N/A	N/A	Yes	N/A	28mm	N/A	N/A	-	-
61500032701	LED Display-case profile 1m	N/A	N/A	Yes	N/A	28mm	N/A	N/A	-	-
61500032761	LED Display-case profile 2,95m 5er Set	N/A	N/A	Yes	N/A	28mm	N/A	N/A	-	-
LED-2-Link - Haltearm		IP20	-	No	-	-	-	N/A	-	-
61500032913	LED-2-Link holding arm 300mm with supply cable 2,5m max. 48W	IP20	N/A	Yes	-	28mm	N/A	N/A	-	-
61500032903	LED-2-Link holding arm 300mm without supply cable	N/A	N/A	Yes	N/A	28mm	N/A	N/A	-	-
61500032911	LED-2-Link holding arm 300mm with supply cable 2,5m max. 48W	IP20	N/A	Yes	-	28mm	N/A	N/A	-	-
61500032901	LED-2-Link holding arm 300mm without supply cable	N/A	N/A	Yes	N/A	28mm	N/A	N/A	-	-
LED-2-Link - Montagehülse		N/A	-	No	N/A	-	-	N/A	-	-


61500030003	Mounting Sleeve LED Mounting Profile black	N/A	N/A	Yes	N/A	28mm	N/A	N/A	-	-
61500030007	Mounting sleeve LED surface-mounted profile anodised aluminium	N/A	N/A	Yes	N/A	28mm	N/A	N/A	-	-
LED-2-Link - Abdeckprofil 15 mm		N/A	-	No	N/A	-	-	N/A	-	-
61500032813	LED Cover Profile 15mm 1m	N/A	N/A	No	N/A	28mm	N/A	N/A	-	-
61500032863	LED Cover Profile 15mm 2,95m set of 5	N/A	N/A	No	N/A	28mm	N/A	N/A	-	-
61500032810	LED Cover Profile 15mm 1m	N/A	N/A	No	N/A	28mm	N/A	N/A	-	-
61500032861	LED Cover Profile 15mm 2,95m set of 5	N/A	N/A	No	N/A	28mm	N/A	N/A	-	-




end cap

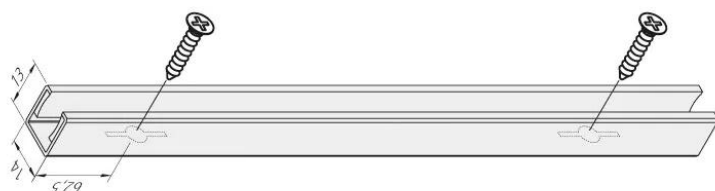




mounting sleeve




adapter



glass shelf holder



feeder element



connector

