24V Dynamic-Controller - Touch

for controlling the light colour (from extra warm to cool white) 24V Dynamic-Controller Touch 48W with 3 solder bridges

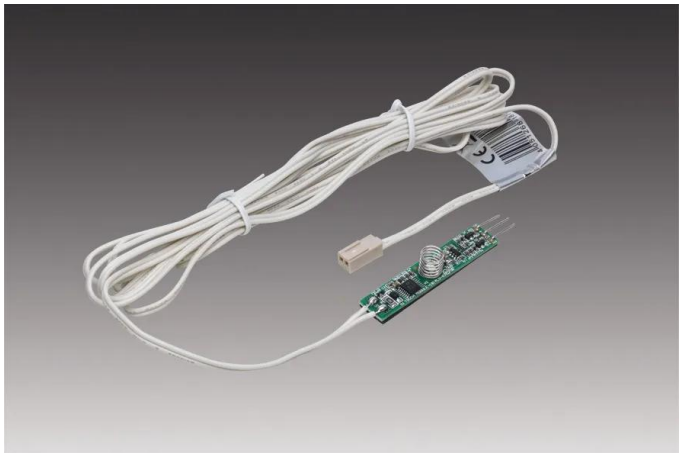

Description:
Touch-Controller for Switch and Steuern of 24 V Dynamic Tapes, for Anlöten or. for Auswahl in the Configurator. This version is designed for a power rating of 48 W. With memory function (the previous light colour and brightness are restored after disconnection from the mains).

Order number:
20805005011

limited availability

Connection: LED-Trafo DC 24V
Light colour: N/A
Energy efficiency class: N/A
Symbols: IP20, SK II
Weight: 0,03 kg

Special features:

- For Auswahl in the Configurator
- 24 V DC
- Ready to plug in and suitable as an option for every new installation or subsequent extension of the existing system
- With memory function (the previous light colour and brightness are restored after disconnection from the mains)
- Wireless remote controls for Dim, Switch and Adjust the Light colour
- With a Remote control or. per Channel can any number of many Wireless controller in parallel controlled are
- All Controller with „Soft Off" and „Multicontrol" (it can Up to 7 various Transmitter on a Controller paired are)
- DALI Controller
- For connection to complex control systems and bus systems
- BLE Controller (Bluetooth Low Energy)
- Controllable via any iOS or Android Smartphone or Tablet (with free Meshle-App)
- Range Indoor area Up to 15 m (Mesh-Network)
- Freely programmable scenes
- Extremely easy Installation using Plug & Play Components and Connector systems
- Can be used individually as a stand-alone control
- Up to 30 Controller connect automatically with one another and can via Bluetooth in the App controlled are
- Incl. Timer-Function (individual A- and Switch-off times)
- LED Transformer DC 24 V
- Connector system: Dynamic
- Protection rating: IP20
- For Dynamic-Lights with Dynamic plug
- UP Wireless-Push-button-Module for Dim, Switch and Adjust the Light colour with commercially available Push-button (Range 15 m / with Walls and Ceilings low)

- 4 Channel-Wireless remote control incl. Master-Push-button and Wall bracket, also can be combined with Dimm-Controllers
- Surface mounting-Wireless remote control with Wall bracket
- Recessed installation-Wireless remote control for Wood drill hole ø 35 mm min. 12 mm deep incl. Surface-mounted housing in stainless-steel look or for the Use in Standard-Socket outlets

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	Gehäusefarbe
20805005011	24V Dynamic-Controller Touch 48W with 3 solder bridges	Anodized aluminum