


Dynamic IN-Stick SF

12mm aluminium-recessed luminaire with adjustable colour appearance Dynamic LED IN-Stick SF 1130mm 18,4W

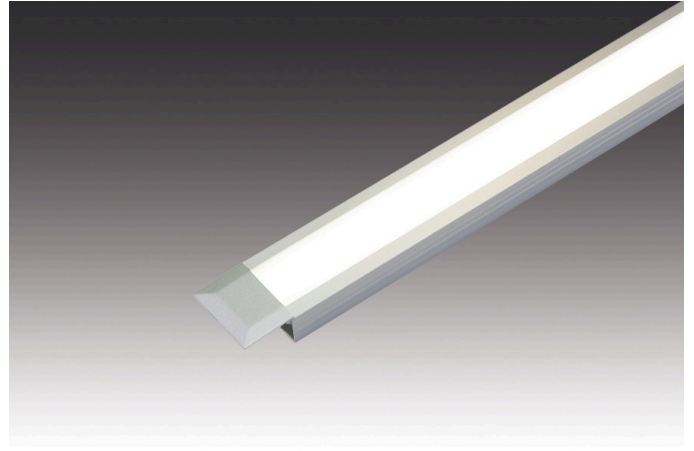

Description:

Lean recessed LED luminaire with homogeneous planar light for grooves of 20mm width and 12mm depth, housing anodized aluminium, mains cable 2,5m with Dynamic plug, colour appearance adjustable between 2700 K and 5000 K, required accessories : Dynamic-Controller with radio remote control, DALI or WiFi App for dimming and adjusting the light colour


Connection:	LED-Trafo DC 24 V
Life:	L70/B10 >= 50.000 h
Light colour:	2700 – 5000 K (Dynamic) adjustable
Beam angle:	100°
Energy efficiency:	LED 129 lm/W; luminaire: 574 lm/m (40 lm/W)
Energy efficiency class:	G
Colour rendering:	Ra/CRI >= 80
Symbols:	CE, MM, IP44, SK III
EAN-No.:	4051268130448
Weight:	0,28 kg

Special features:

- only 12 mm thickness
- no visible luminous spots
- colour appearance adjustable between approx. 2700 K (xw) and 5000 K (cw)

Dynamic IN-Stick SF

	Ø	xw	nw	cw
0,5m	560	1184 lx	1288 lx	1356 lx
1,0m	1120	296 lx	322 lx	339 lx
1,5m	1680	132 lx	143 lx	151 lx
2,0m	2240	74 lx	81 lx	85 lx
2,5m	2800	47 lx	52 lx	54 lx

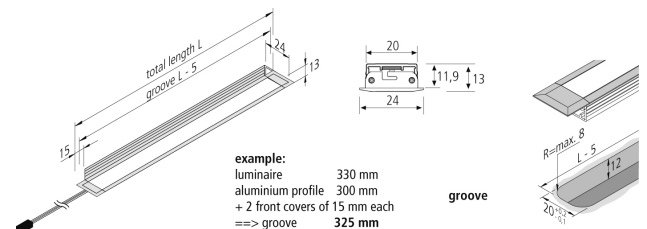

Order number:
61001830401

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description
61001830101	Dynamic LED IN-Stick SF 330mm 5,2W
61001830201	Dynamic LED IN-Stick SF 530mm 8,6W
61001830301	Dynamic LED IN-Stick SF 830mm 13,6W
61001830401	Dynamic LED IN-Stick SF 1130mm 18,4W

Order number: 61001830401

