

## IN-Stick SF



12mm flat aluminium recessed luminaire LED IN-Stick SF 1130mm 20,4W nw




### Description:

Lean recessed LED luminaire with homogeneous planar light for milled groove 20mm wide and 12mm deep, housing aluminum, supply cable 2.5m with LED 24 plug, colour appearance nw (neutral white) approx. 4000K, optional accessories: dim controller with remote control, DALI or 1-10V

**Connection:** LED-Trafo DC 24 V  
**Life:** L70/B10 >= 50.000 h  
**Light colour:** 4000 K neutral white  
**Beam angle:** 100°  
**Energy efficiency:** LED 120 lm/W; luminaire: 842 lm/m (45 lm/W)  
**Energy efficiency class:** G  
**Colour rendering:** Ra/CRI >= 93  
**Symbols:** CE, MM, UL, IP44, SK III  
**EAN-No.:** 4051268120395  
**Weight:** 0,28 kg


### Special features:

- only 12 mm depth of the groove
- no visible luminous spots

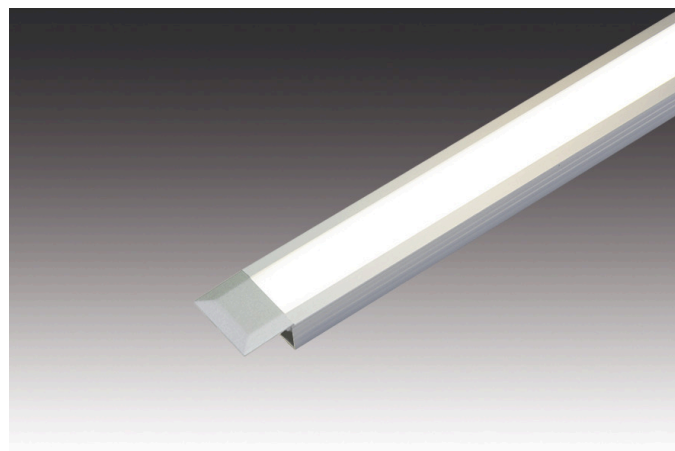

### IN-Stick SF

	100°	Ø	ww	nw
0,5m		560	1184 lx	1268 lx
1,0m		1120	296 lx	317 lx
1,5m		1680	132 lx	141 lx
2,0m		2240	74 lx	79 lx
2,5m		2800	47 lx	51 lx

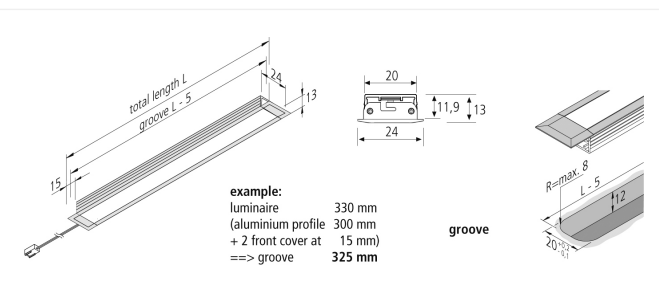

**Order number:**  
61001550703


limited availability



## available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	light colour
61001550102	LED IN-Stick SF 330mm 5,8W ww	3000 K warm white
61001550302	LED IN-Stick SF 530mm 9,6W ww	3000 K warm white
61001550502	LED IN-Stick SF 830mm 15,1W ww	3000 K warm white
61001550702	LED IN-Stick SF 1130mm 20,4W ww	3000 K warm white
61001550103	LED IN-Stick SF 330mm 5,8W nw	4000 K neutral white
61001550303	LED IN-Stick SF 530mm 9,6W nw	4000 K neutral white
61001550503	LED IN-Stick SF 830mm 15,1W nw	4000 K neutral white
61001550703	LED IN-Stick SF 1130mm 20,4W nw	4000 K neutral white

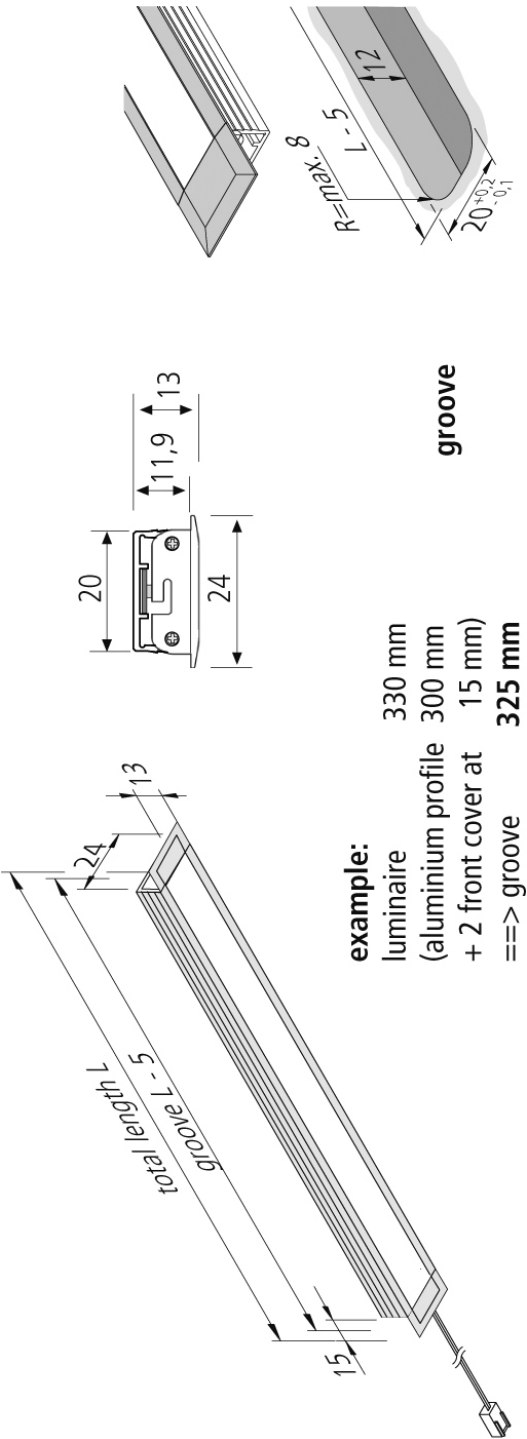

**example:**  
luminaire  
(aluminium profile  
+ 2 front cover at  
=> groove

330 mm
300 mm
15 mm)
325 mm

groove