


BasicLite F



230V aluminium linear luminaire with homogeneous planar light LED BasicLite F 1438mm 16W ww

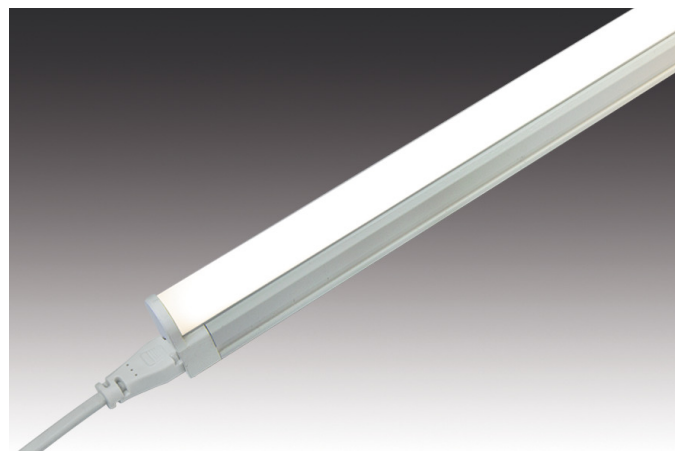

Description:

Very compact LED luminaire for 230V, small rigid connector for minimum spacing between luminaires, easy installation with enclosed mounting clips, colour appearance ww (warm white) approx. 3000K, optional accessories: horizontal or vertical supply or connecting cables

Connection: 220 - 240V / 50 - 60Hz
Life: L70/B10 >= 60.000 h
Light colour: 3000 K warm white
Beam angle: 170°
Energy efficiency: LED 140 lm/W; luminaire: 1500 lm/m (120 lm/W)

Energy efficiency class: E


Colour rendering: Ra/CRI >= 80
Symbols: CE, MM, IP20, SK II
EAN-No.: 4051268132510
Weight: 0,4 kg

Special features:

- rigid connector for minimum spacing between luminaires

BasicLite F

	170°	Ø	ww	nw
0,5m		825	1868 lx	2000 lx
1,0m		1650	467 lx	500 lx
1,5m		2475	208 lx	222 lx
2,0m		3300	117 lx	125 lx
2,5m		4125	75 lx	80 lx

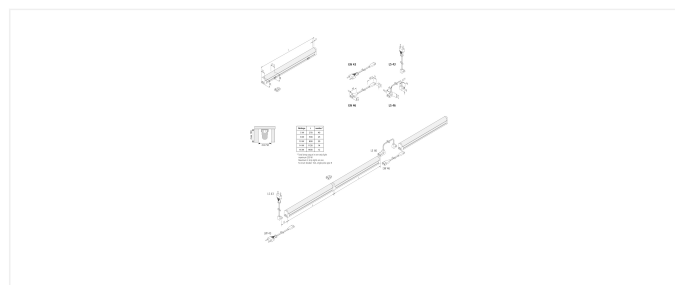

Order number:
20202610502

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	light colour
20202610102	LED BasicLite F 278mm 5W ww	3000 K warm white
20202610202	LED BasicLite F 538mm 8W ww	3000 K warm white
20202610302	LED BasicLite F 838mm 10W ww	3000 K warm white
20202610402	LED BasicLite F 1138mm 14W ww	3000 K warm white
20202610502	LED BasicLite F 1438mm 16W ww	3000 K warm white
20202610103	LED BasicLite F 278mm 5W nw	4000 K neutral white
20202610203	LED BasicLite F 538mm 8W nw	4000 K neutral white
20202610303	LED BasicLite F 838mm 10W nw	4000 K neutral white
20202610403	LED BasicLite F 1138mm 14W nw	4000 K neutral white
20202610503	LED BasicLite F 1438mm 16W nw	4000 K neutral white

