

Basic-Tape 2



Self-adhesive, with high colour rendering LED Basic-Tape P 5m 1200 LED 120W ww



Description:

Flexible LED tape on roll, light color warm white approx. 3000K, quick and easy installation by the already applied double-sided 3M adhesive tape, supply cable 2,5m with 2x LED 24 plugs already attached, the tape can be cut every 25mm (see marking). Afterwards the tape can be contacted again without soldering with the connection clip or the cables, optional accessories: dimmable transformer with radio remote control or 1-10V dimmer, glass edge profile for lateral light feed of glass panes, corner profile, mounting profile, cover profile or milled profile

Connection: LED-Trafo DC 24V
Life: L70/B10 >= 50.000h
Light colour: 3000K warm white
Beam angle: 120°
Energy efficiency: LED 120 lm/W; luminaire: 2472 lm/m (103 lm/W)


Energy efficiency class: F
Colour rendering: Ra/CRI >= 90
Symbols: CE, MM, IP20, SK III
EAN-No.: 4,05E+12
Weight: 0,12 kg

Special features:

- max. 5m (version 120W) on one supply cable
- quick and easy installation due to double-sided adhesive tape
- tapes can be shortened at 25mm (version 1200 LED) intervals according to the marks
- afterwards the tapes can be reconnected without soldering up to 1,5m max. with the connecting clips or cables
- use Basic-Tape 1200 P only with aluminium profiles (cooling)!

Basic Tape 2

	120°	Ø	20W	40W	80W	120W
0,5m		650	812 lx	1524 lx	2972 lx	4572 lx
1,0m		1300	203 lx	381 lx	743 lx	1143 lx
1,5m		1950	90 lx	169 lx	330 lx	507 lx
2,0m		2600	51 lx	95 lx	186 lx	285 lx
2,5m		3250	32 lx	61 lx	119 lx	183 lx

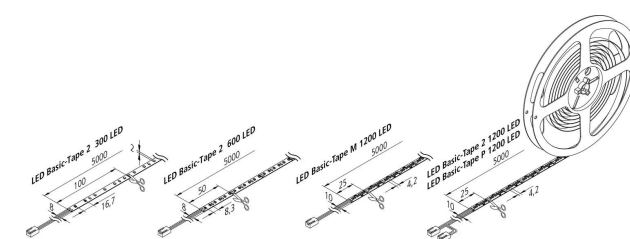

Order number:
20202480502

article in stock



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	energy efficiency	colour rendering	light colour
20202480102	LED Basic-Tape 2 5m 300 LED 20W ww	LED 120 lm/W luminaire: 412 lm/m (103 lm/W)	Ra/CRI >= 95	3000K warm white
20202480103	LED Basic-Tape 2 5m 300 LED 20W nw	LED 120 lm/W luminaire: 412 lm/m (103 lm/W)	Ra/CRI >= 95	4000K neutral white
20202480204	LED Basic-Tape 2 5m 600 LED 40W xw	LED 120 lm/W luminaire: 824 lm/m (103 lm/W)	Ra/CRI >= 95	2700K extra warm white
20202480202	LED Basic-Tape 2 5m 600 LED 40W ww	LED 120 lm/W luminaire: 824 lm/m (103 lm/W)	Ra/CRI >= 95	3000K warm white
20202480203	LED Basic-Tape 2 5m 600 LED 40W nw	LED 120 lm/W luminaire: 824 lm/m (103 lm/W)	Ra/CRI >= 95	4000K neutral white
20202480201	LED Basic-Tape 2 5m 600 LED 40W cw	LED 120 lm/W luminaire: 824 lm/m (103 lm/W)	Ra/CRI >= 95	5000K cool white
20202480205	LED Basic-Tape 2 5m 600 LED 40W dl	LED 120 lm/W luminaire: 824 lm/m (103 lm/W)	Ra/CRI >= 95	6500K daylight
20202480304	LED Basic-Tape 2 5m 1200 LED 80W xw	LED 120 lm/W luminaire: 1650 lm/m (117 lm/W)	Ra/CRI >= 95	2700K extra warm white
20202480302	LED Basic-Tape 2 5m 1200 LED 80W ww	LED 120 lm/W luminaire: 1650 lm/m (117 lm/W)	Ra/CRI >= 95	3000K warm white
20202480303	LED Basic-Tape 2 5m 1200 LED 80W nw	LED 120 lm/W luminaire: 1650 lm/m (117 lm/W)	Ra/CRI >= 95	4000K neutral white
20202480502	LED Basic-Tape P 5m 1200 LED 120W ww	LED 120 lm/W; luminaire: 2472 lm/m (103 lm/W)	Ra/CRI >= 90	3000K warm white
20202480503	LED Basic-Tape P 5m 1200 LED 120W nw	LED 120 lm/W; luminaire: 2472 lm/m (103 lm/W)	Ra/CRI >= 90	4000K neutral white

