

Dynamic Tape S



Silicone coated, adjustable IP54 Set of 1 Dynamic LED Tape S 5000mm 72,0W + transformer 75W



Description:

Flexible LED tape with silicon protection on roll, light colour adjustable between approx. 2700K and 5000K, quick and easy installation by the already applied double-sided 3M tape, supply cable 2,5m with Dynamic plug already attached, the tape can be cut every 50mm (see marking), accessories: controller with radio remote control, DALI, ZigBee or WiFi app for dimming and adjusting the light colour

Connection:	LED-Trafo DC 24 V
Life:	L90/B10 >= 50.000 h
Light colour:	2700 – 5000 K (Dynamic) adjustable
Beam angle:	120°
Energy efficiency:	LED: 130 lm/W; luminaire: 1300 lm/m (87 lm/W)
Energy efficiency class: G	
Colour rendering:	Ra/CRI >= 90
Symbols:	CE, MM, IP54, SK III
EAN-No.:	4051268206334
Weight:	0,695 kg

Special features:


- max. 5m per supply cable
- quick and easy installation due to double-sided adhesive tape
- tapes can be shortened at 50mm intervals (marking between the LEDs)
- the power (W) of partial sections cannot be calculated linearly, please refer to the configurator!
- colour appearance adjustable between 2700K (xw) and 5000K (cw)
- with IP54 suitable for applications requiring higher ingress protection (general humidity, bathroom, kitchen, shops). The silicone compound assures an additional mechanical protection e.g. for regular cleaning works.


available versions

Choose from the options below. The currently selected one is highlighted in color.





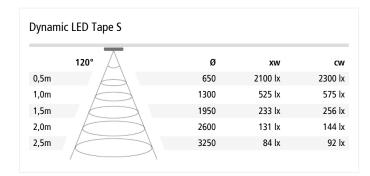



61059510109

limited availability



Dynamic Tape S Set of 1 Dynamic LED Tape S 5000mm 72,0W + transformer 75W Order number: 61059510109

