

FR 55



11mm flat, 55-58mm hole homogeneous recessed furniture luminaire FR 55-LED 3W nw stainless steel



Description:

LED recessed spotlight with area light, plastic housing, connecting cable 2.5m with LED 24 connector, light color neutral white approx. 4000K, quick and easy installation by snap-in hooks, optional accessories: Dimm controller with radio remote control, WiFi app, DALI or 1-10V dimmer, mounting ring for installation without mounting hole

Connection: LED-Trafo DC 24V
Life: L70/B10 >= 50.000h
Light colour: 4000K neutral white
Beam angle: 110°
Energy efficiency: LED: 113 lm/W; luminaire: 210 lm (70 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 93
Symbols: CE, MM, IP44, SK III
EAN-No.: 4,05E+12
Weight: 0,07 kg

Special features:

- suitable for mounting in metal sheet
- no visible luminous spots




FR 55

	110°	Ø	ww	nw
0,5m		620	320 lx	340 lx
1,0m		1240	80 lx	85 lx
1,5m		1860	36 lx	38 lx
2,0m		2480	20 lx	21 lx
2,5m		3100	13 lx	14 lx

Drilling hole



55-58mm




Order number:
61001783008

article in stock

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing	light colour
61001782003	FR 55-LED 3W ww black	Black	3000K warm white
61001782006	FR 55-LED 3W ww matt chrome	Matt chrome	3000K warm white
61001782008	FR 55-LED 3W ww stainless steel	Stainless steel	3000K warm white
61001783003	FR 55-LED 3W nw black	Black	4000K neutral white
61001783006	FR 55-LED 3W nw matt chrome	Matt chrome	4000K neutral white
61001783008	FR 55-LED 3W nw stainless steel	Stainless steel	4000K neutral white
61056933002	set of 3 FR 55-LED 3W ww black	Black	3000K warm white
61056938002	set of 3 FR 55-LED 3W ww stainless steel	Stainless steel	3000K warm white
61056938003	set of 3 FR 55-LED 3W nw stainless steel	Stainless steel	4000K neutral white
61056958002	set of 5 FR 55-LED 3W ww stainless steel	Stainless steel	3000K warm white
61056958003	set of 5 FR 55-LED 3W nw stainless steel	Stainless steel	4000K neutral white

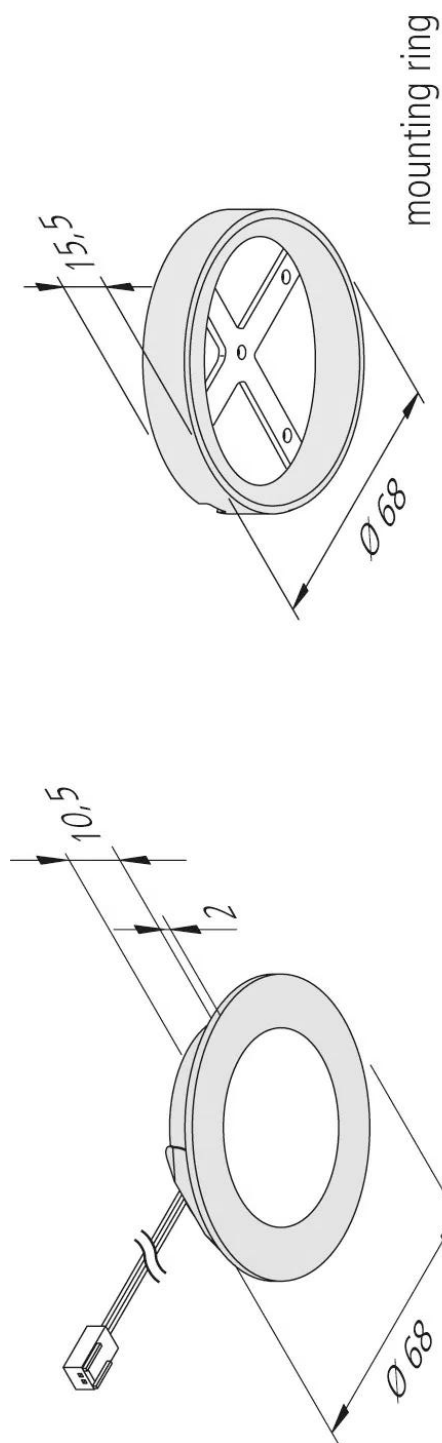

mounting ring

use spacer min. 50 mm at insulation

