


Wall



230V flush-mounted wall recessed luminaire for 68mm hole Wall I Down 1,8W stainless steel

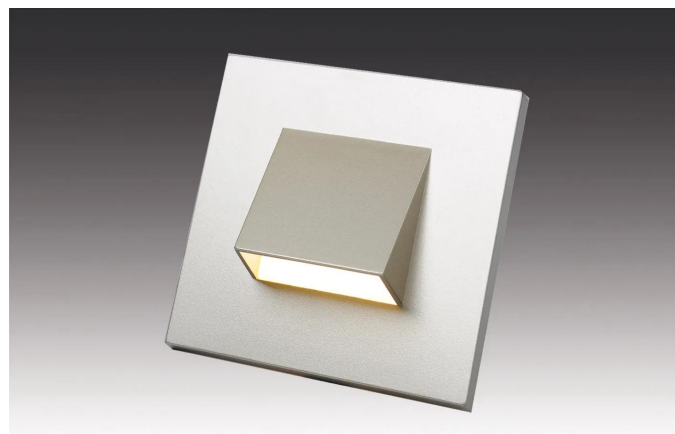

Description:

LED recessed wall light, simple installation in standard flush-mounted and cavity wall boxes, direct connection to 230V with integrated through-wiring, no visible light points; versions "I" with integrated invisible motion detector (run-on time: 3 min.)

Connection: 220 - 240V / 50 - 60Hz
Life: L70/B10 >= 60.000h
Light colour: 3000K warm white
Beam angle: 120°
Energy efficiency: LED: 105 lm/W luminaire: 90 lm (50 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 84
Symbols: CE, MM, ENEC18, IP20, SK I
EAN-No.: 4,05E+12
Weight: 0,07 kg


Special features:

- quick and easy installation due to standard surface pattress box and flush-mounted socket
- direct connection to 230V
- no visible luminous spots
- decorative rings also available individually NEW: versions "I" with integrated invisible motion detector (run-on time: 3 min.)

Drilling hole



68mm



Order number:
20202722208

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing
20202721108	Wall Up & Down 1,8W stainless steel	Stainless steel
20202720103	Wall F 1,8W black	Black
20202720403	Wall IF 1,8W black	Black
20202722201	Wall I Down 1,8W white RAL 9016	White
20202722208	Wall I Down 1,8W stainless steel	Stainless steel

