


## Wall



230V flush-mounted wall recessed luminaire for 68mm hole Wall I Down 1,8W white RAL 9016

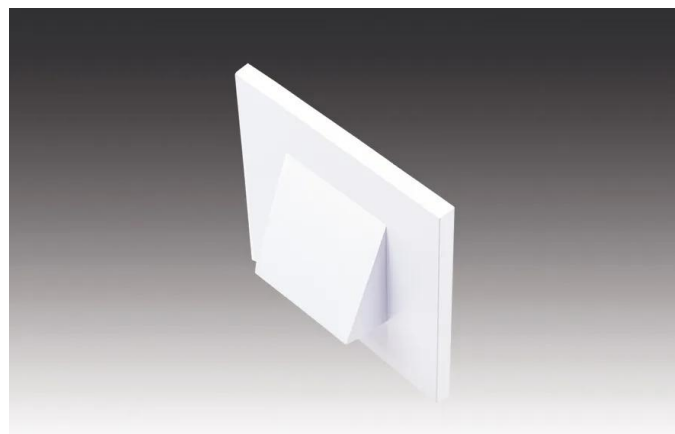

### Description:

LED recessed wall light, simple installation in standard flush-mounted and cavity wall boxes, direct connection to 230V with integrated through-wiring, no visible light points; versions "I" with integrated invisible motion detector (run-on time: 3 min.)

**Connection:** 220 - 240V / 50 - 60Hz  
**Life:** L70/B10 >= 60.000h  
**Light colour:** 3000K warm white  
**Beam angle:** 120°  
**Energy efficiency:** LED: 105 lm/W luminaire: 90 lm (50 lm/W)  
**Energy efficiency class:** G  
**Colour rendering:** Ra/CRI >= 84  
**Symbols:** CE, MM, ENEC18, IP20, SK I  
**EAN-No.:** 4,05E+12  
**Weight:** 0,07 kg


### Special features:

- quick and easy installation due to standard surface pattress box and flush-mounted socket
- direct connection to 230V
- no visible luminous spots
- decorative rings also available individually NEW: versions "I" with integrated invisible motion detector (run-on time: 3 min.)

### Drilling hole



68mm



**Order number:**  
20202722201

limited availability

## available versions

Choose from the options below. The currently selected one is highlighted in color.

| article number | description                         | colour of housing |
|----------------|-------------------------------------|-------------------|
| 20202721108    | Wall Up & Down 1,8W stainless steel | Stainless steel   |
| 20202720103    | Wall F 1,8W black                   | Black             |
| 20202720403    | Wall IF 1,8W black                  | Black             |
| 20202722201    | Wall I Down 1,8W white RAL 9016     | White             |
| 20202722208    | Wall I Down 1,8W stainless steel    | Stainless steel   |

