FQ 65/205

IP 20

Dimmbare An-/recessed light for cut-outs from 65 to 205 mm FQ 65/205-LED 18W nw white






Description:
A- / Surface-mounted spotlight with Area light Plastic housing, incl. Connection terminal for 230 V with integrated through-wiring, Light colour nw (neutral white) approx. 4000 K, Quick and easy installation using adjustable Spring terminals for Holes of 65 to 205 mm, dimmable with Phase-cut dimmer. The uniform illuminated surface remains free of visible points of light.

Connection: 220 - 240V / 50 - 60Hz
Light colour: 4000K Neutral white
Beam angle: 115°
Energy efficiency: LED: 100 lm/W; Leuchte: 1170 lm/m (65 lm/W)
Energy efficiency class: N/A
Symbols: IP20, SK II
Weight: 0,46 kg

Special features:

- Direct connection to 230 V with integrated through-wiring
- No visible points of light
- Adjustable Mounting spring for all Holes of 65 to 205 mm
- Recommended Phases-Dimmer: Busch-Jaeger 6523U-102, Jung 1730DD or Sygonix 33594R
- Light colour: 4000 K neutral white
- Incl. Connection terminal for 230 V with integrated through-wiring
- Recommended Phases-Dimmer: Busch-Jaeger 6523U-102, Jung 1731DD or 1711DE or Sygonix 33594R
- Design: Wide-beam spotlight >80°
- 220–240 V / 50–60 Hz
- Protection rating: IP20
- Dimmable with compatible control
- Housing colour: White

FQ 65/205




	Ø	xw	ww	nw
0,5m	1600	1580 lx	1660 lx	1744 lx
1,0m	3100	395 lx	415 lx	436 lx
1,5m	4700	176 lx	184 lx	194 lx
2,0m	6300	99 lx	104 lx	109 lx
2,5m	7800	63 lx	66 lx	70 lx

Drilling hole



65-205mm

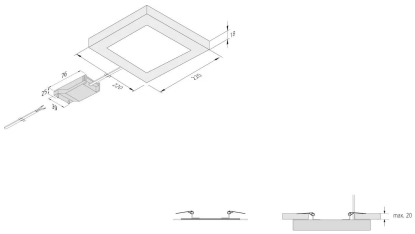

Order number: 20203080101

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	Gehäusefarbe	light colour
20203080103	FQ 65/205-LED 18W xw white	Anodized aluminum	2700K Extra warm white
20203080102	FQ 65/205-LED 18W ww white	Anodized aluminum	3000K Warm white
20203080101	FQ 65/205-LED 18W nw white	Anodized aluminum	4000K Neutral white

Order number: 20203080101

