

AR 68

Flat recessed luminaire with metal casing AR 68-LED 4W xw stainless steel look



Description:

LED recessed luminaire with low glare, metal housing, supply cable 2.5m with LED 24 plug for direct plug-in connection at the spotlight, colour appearance extra warm white approx. 2700K, quick and easy installation with snap-in hook, optional accessories: dim controller with radio remote control, Alexa, WiFi, DALI, ZigBee, Casambi, Sonar or 1-10V dimmer, mounting spring to screw on for the use in lightweight ceilings

Connection:	LED-Trafo DC 24V
Life:	L70/B10 >= 60.000h
Light colour:	2700K extra warm white
Beam angle:	60°
Energy efficiency:	LED: 120 lm/W; luminaire: 300 lm (75 lm/W)
Energy efficiency class:	G
Colour rendering:	Ra/CRI >= 93
Symbols:	CE, MM, IP44, SK III
EAN-No.:	4,05E+12
Weight:	0,079 kg

Special features:

- metal casing
- flush mounting in 16mm panels
- glare-free with recessed reflector and clear diffuser


AR 68

60°	Ø	xw	ww	nw
0,5m	425	1008 lx	1080 lx	1156 lx
1,0m	850	252 lx	270 lx	289 lx
1,5m	1275	112 lx	120 lx	128 lx
2,0m	1700	63 lx	68 lx	72 lx
2,5m	2125	40 lx	43 lx	46 lx

Drilling hole



68mm

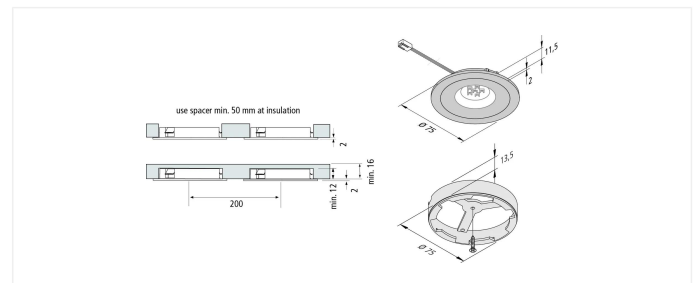


Order number:
20203238004

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing	light colour
20203233004	AR 68-LED 4W xw black	Black	2700K extra warm white
20203238004	AR 68-LED 4W xw stainless steel look	Stainless steel	2700K extra warm white
20203233002	AR 68-LED 4W ww black	Black	3000K warm white
20203238002	AR 68-LED 4W ww stainless steel look	Stainless steel	3000K warm white
20203233003	AR 68-LED 4W nw black	Black	4000K neutral white
20203238003	AR 68-LED 4W nw stainless steel look	Stainless steel	4000K neutral white

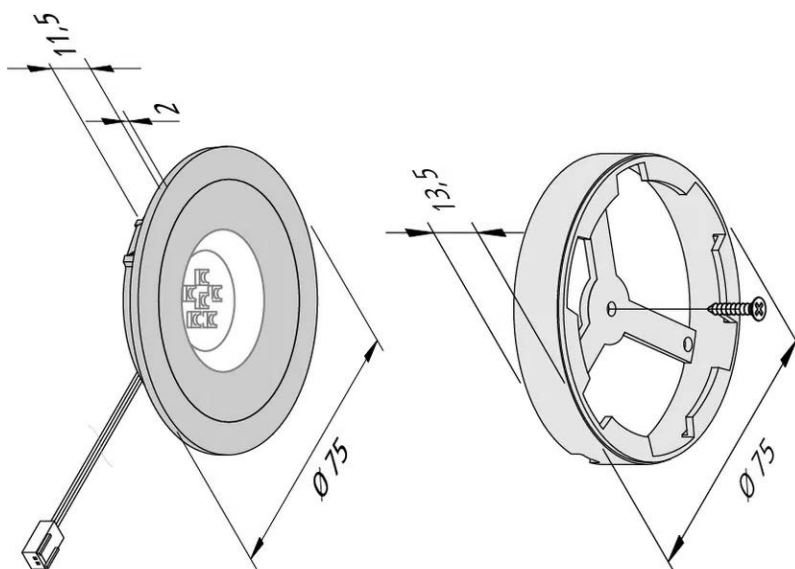

use spacer min. 50 mm at insulation

