Dim-2-Warm SR 68

IP 44 | LED 350

light with a warmer light colour when dimmed Dim-2-Warm SR 68 6,5W ww matt chrome





Description:
Pivotable LED-Recessed spotlight, Metal housing, Connection cable 0,2 m with LED 350-Plug, Light colour ww (warm white) approx. 3000 K is when Dim (only with Phase-cut dimmer) wämer (to 2000 K), Quick and easy installation using Spring terminals, Accessories: small runder phasendimmbarer Transformer for the 68er Drill hole.

Connection:	LED-Trafo DC 350mA
Light colour:	3000K Warm white
Beam angle:	43°
Energy efficiency:	LED: 93 lm/W; Leuchte: 455 lm/m (70 lm/W)
Energy efficiency class:	N/A
Symbols:	IP44, SK III
Weight:	0,12 kg

Special features:

- Gimbal-mounted pivotable by 20°
- Metal housing
- Light colour: 3000 K warm white
- Suitable for display screen workstations! (UGR<19)
- Connection cable 0,2 m with LED 350-Plug
- Design: Spot ?60°
- LED Transformer DC 350 mA
- Connector system: LED 350
- Protection rating: IP44
- Dimmable with compatible control
- Adjustable version
- Housing colour: Matt chrome


Dim-2-Warm SR 68

44°	Ø	350mA
0,5m	400	3440 lx
1,0m	800	860 lx
1,5m	1200	382 lx
2,0m	1600	215 lx
2,5m	2000	138 lx

Drilling hole



68-74mm (ohne Ring) 68-84mm (mit Ring)

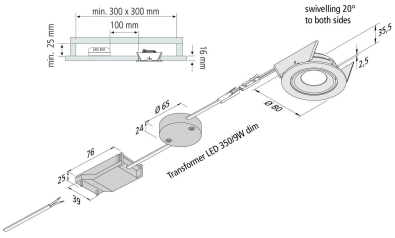

Order number:
20203010206

limited availability

HERA LED WARRANTY 5 YEARS

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	Gehäusefarbe
20203010201	Dim-2-Warm SR 68 6,5W ww white	Anodized aluminum
20203010206	Dim-2-Warm SR 68 6,5W ww matt chrome	Chrom-matt
20203010208	Dim-2-warm SR 68 6,5W ww stainless-steel look	White

Order number: 20203010206

