

AQ 78



Powerful, flat aluminium recessed luminaire square AQ 78-LED 7,5W nw stainless steel look



Description:

LED recessed spotlight, aluminum housing, connecting cable 2.5m with LED 24-plug, light color neutral white approx. 4000K, quick and easy installation with snap-in hooks, optional accessories: dimming controller with radio remote control, WiFi app, DALI or 1-10V dimmer, mounting spring for screwing on for secure hold in lightweight ceilings

Connection: LED-Trafo DC 24V
Life: L70/B10 >= 60.000h
Light colour: 4000K neutral white
Beam angle: 80°
Energy efficiency: LED: 90 lm/W; luminaire: 450 lm (60 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 98
Symbols: CE, MM, UL, IP44, SK III
EAN-No.: 4,05E+12
Weight: 0,115 kg

Special features:

- flush mounting in 16mm panels
- metal casing
- genuine glass cover
- with mounting spring also ideal for the use in plasterboard ceilings glare-free with recessed reflector and clear diffuser


AR 78 / AQ 78

	80°	Ø	ww	nw
0,5m		500	888 lx	960 lx
1,0m		1000	222 lx	240 lx
1,5m		1500	99 lx	107 lx
2,0m		2000	56 lx	60 lx
2,5m		2500	36 lx	38 lx

Drilling hole



78mm

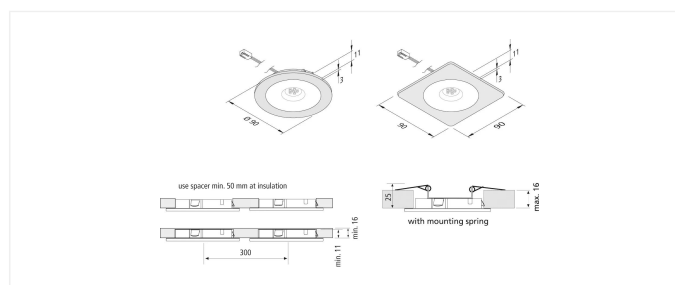

Order number:
61001510308

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing	light colour
61001510201	AQ 78-LED 7,5W ww white	White	3000K warm white
61001510203	AQ 78-LED 7,5W ww black	Black	3000K warm white
61001510208	AQ 78-LED 7,5W ww stainless steel	Stainless steel	3000K warm white
61001510301	AQ 78-LED 7,5W nw white	White	4000K neutral white
61001510303	AQ 78-LED 7,5W nw black	Black	4000K neutral white
61001510308	AQ 78-LED 7,5W nw stainless steel look	Stainless steel	4000K neutral white

Order number: 61001510308

