


Dynamic SR 68



Swivel and tilt recessed ceiling spotlight with adjustable colour appearance Dynamic SR 68-LED 6,5W matt chrome

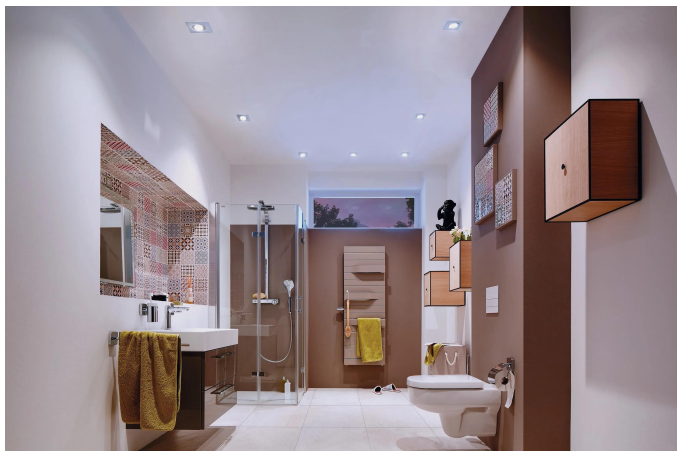

Description:

Swiveling LED recessed spotlight, metal housing, connecting cable 2.5m with dynamic plug, light color adjustable between approx. 2700K and 5000K, quick and easy mounting by spring terminals, control via various radio remote controls, DALI or WiFi controller

Connection: LED-Trafo DC 24V
Life: L70/B10 >= 50.000h
Light colour: 2700 - 5000K (Dynamic) adjustable
Beam angle: 40°
Energy efficiency: LED: 105 lm/W; luminaire: 420 lm (65 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 90
Symbols: CE, MM, IP44, UGR<19, SK III
EAN-No.: 4,05E+12
Weight: 0,145 kg

Special features:

- swivels and tilts 20° to both sides
- metal casing
- colour appearance adjustable between 2700K (xw) and 5000K (cw)
- suitable for screen workplaces! (UGR < 19)



Dynamic SR 68

	40°	Ø	xw	nw	cw
0,5m		300	2960 lx	3160 lx	3400 lx
1,0m		600	740 lx	790 lx	850 lx
1,5m		900	329 lx	351 lx	378 lx
2,0m		1200	185 lx	198 lx	213 lx
2,5m		1500	118 lx	126 lx	136 lx

Drilling hole



68-74mm (ohne Ring) , 68-84mm (mit Ring)



Order number:
20202750106

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing
20202750108	Dynamic SR 68-LED 6,5W stainless steel look	Stainless steel
20202750106	Dynamic SR 68-LED 6,5W matt chrome	Matt chrome
20202750101	Dynamic SR 68-LED 6,5W white	White

