# SR 68 4.8W

IP 44 | LED 350

Swivelling recessed ceiling spotlight for 68–80 mm ceiling cut-outs SR 68-LED 4,8W 22° ww matt chrome

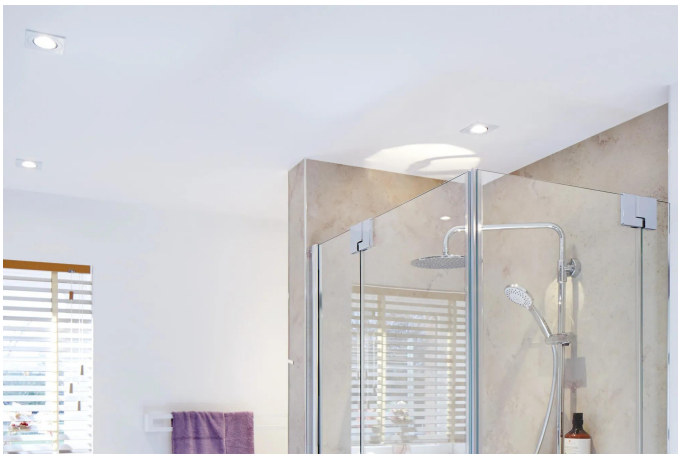

**Description:**
Pivotable LED-Recessed spotlight, Metal housing, Connection cable 0,2 m with LED 350-Plug, Quick and easy installation using Spring terminals, optional accessories: dimmable Transformer for Phase-cut dimmer or 1-10 V Dimmer, light colour warm white approx. 3000 K, gimbal-mounted pivotable by per 20°. Suitable for display screen workstations! (UGR<19).

| | |
|---|---|
| **Connection:** | LED-Trafo DC 350mA |
| **Light colour:** | 3000K Warm white |
| **Beam angle:** | 22° |
| **Energy efficiency:** | LED: 120 lm/W; Leuchte: 485 lm/m (100 lm/W) |
| **Energy efficiency class:** | N/A |
| **Symbols:** | IP44, SK III |
| **Weight:** | 0,11 kg |

**Special features:**

- Gimbal-mounted pivotable by 20°
- Metal housing
- Suitable for display screen workstations! (UGR<19)
- Light colour: 3000 K warm white
- Connection cable 0,2 m with LED 350-Plug
- Beam angle 22° or 35°
- Design: Spot ?60°
- LED Transformer DC 350 mA
- Connector system: LED 350
- Protection rating: IP44
- Dimmable with compatible control
- Adjustable version
- Housing colour: Matt chrome

SR 68 4,8W



| 22° | Ø | ww | nw |
|---|---|---|---|
| 0,5m | 180 | 6640 lx | 7120 lx |
| 1,0m | 360 | 1660 lx | 1780 lx |
| 1,5m | 540 | 738 lx | 791 lx |
| 2,0m | 720 | 415 lx | 445 lx |
| 2,5m | 900 | 266 lx | 285 lx |

Drilling hole

68-74mm (ohne Ring) 68-84mm (mit Ring)



**Order number:**
20202400201

limited availability

HERA LED WARRANTY 5 YEARS

# available versions

Choose from the options below. The currently selected one is highlighted in color.

| article number | description | Gehäusefarbe | shielding angle | light colour |
|---|---|---|---|---|
| 20202401701 | SR 68-LED 4,8W 35° xw white | Anodized aluminum | 35° | 2700K Extra warm white |
| 20202401001 | SR 68-LED 4,8W 35° xw black | Black | 35° | 2700K Extra warm white |
| 20202401401 | SR 68-LED 4,8W 35° xw matt chrome | Chrom-matt | 35° | 2700K Extra warm white |
| 20202402001 | SR 68-LED 4,8W 35° xw stainless-steel look | Anodized aluminum | 35° | 2700K Extra warm white |
| 20202400201 | SR 68-LED 4,8W 22° ww matt chrome | White | 22° | 3000K Warm white |
| 20202401501 | SR 68-LED 4,8W 35° ww white | Anodized aluminum | 35° | 3000K Warm white |
| 20202400801 | SR 68-LED 4,8W 35° ww black | Black | 35° | 3000K Warm white |
| 20202401201 | SR 68-LED 4,8W 35° ww matt chrome | Chrom-matt | 35° | 3000K Warm white |
| 20202401801 | SR 68-LED 4,8W 35° ww stainless-steel look | White | 35° | 3000K Warm white |
| 20202400301 | SR 68-LED 4,8W 22° nw matt chrome | Chrom-matt | 22° | 4000K Neutral white |
| 20202401601 | SR 68-LED 4,8W 35° nw white | Anodized aluminum | 35° | 4000K Neutral white |
| 20202401301 | SR 68-LED 4,8W 35° nw matt chrome | Chrom-matt | 35° | 4000K Neutral white |
| 20202401901 | SR 68-LED 4,8W 35° nw stainless-steel look | White | 35° | 4000K Neutral white |
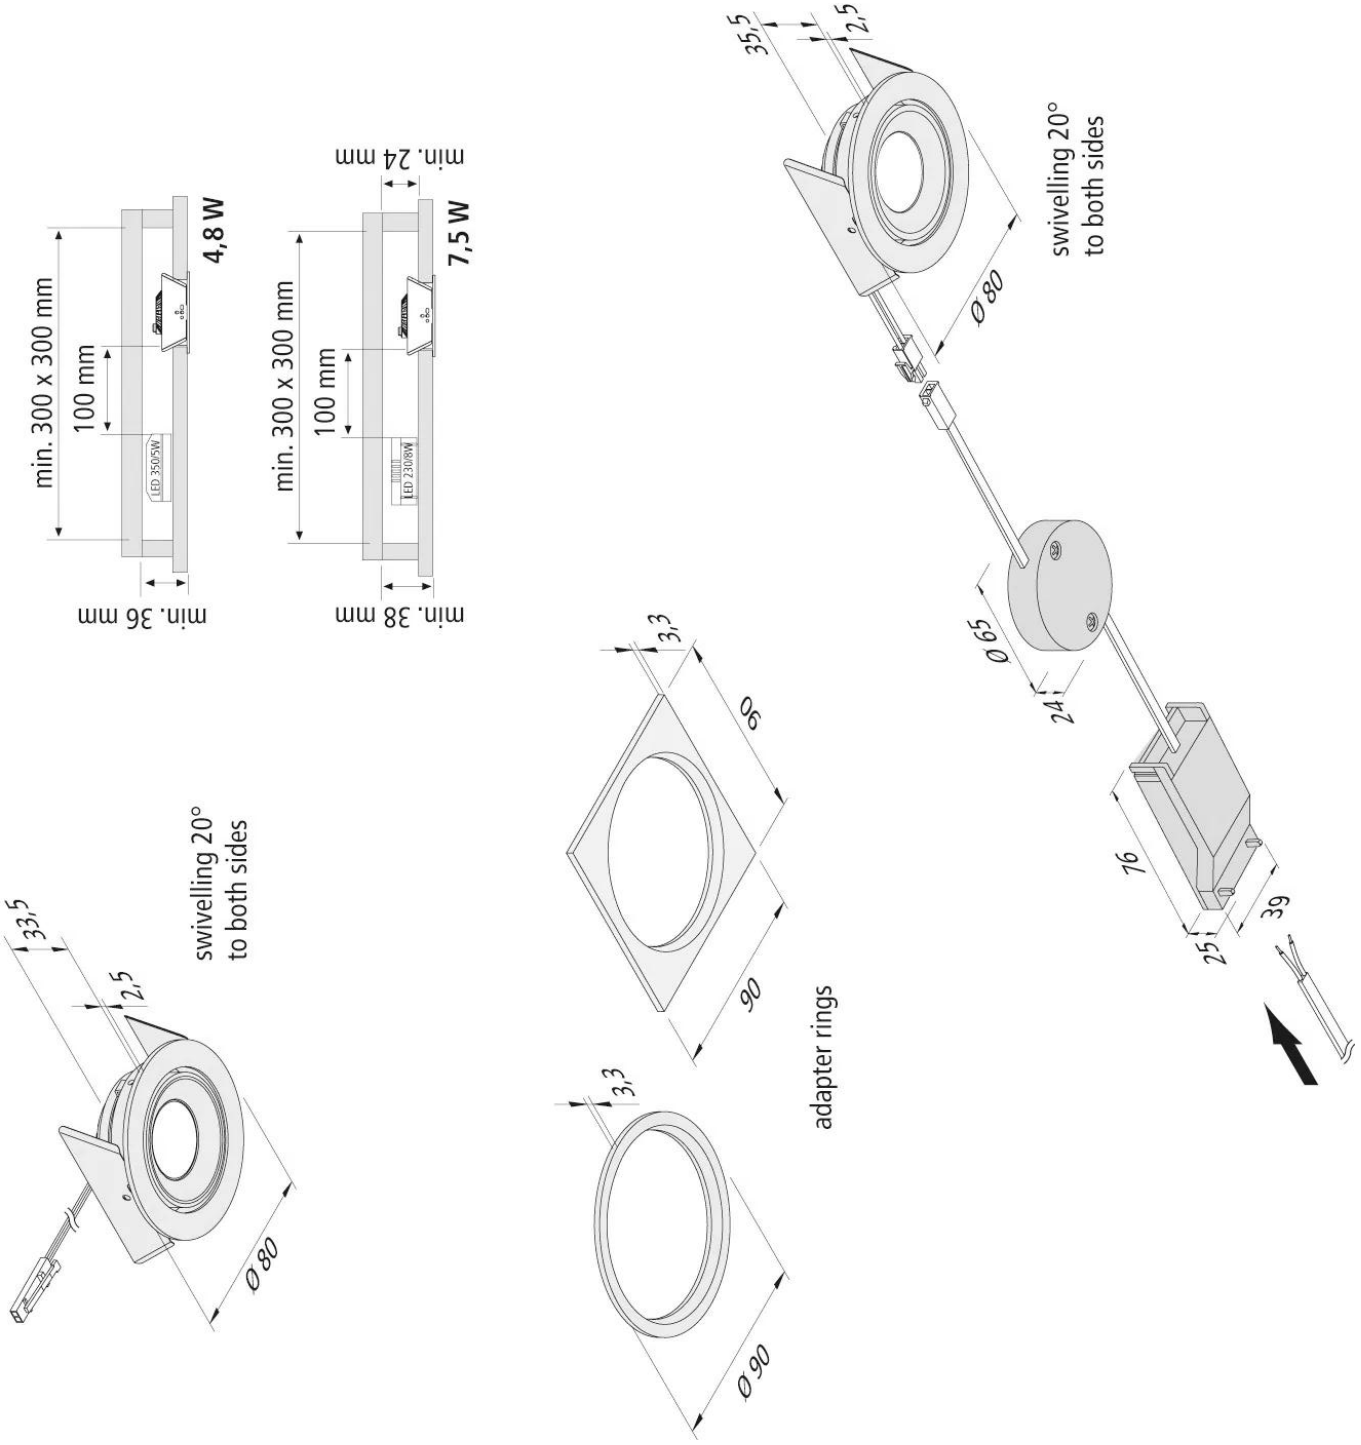
Order number: 20202400201