

LED-2-Link Flood

system linear light with homogeneous area lighting LED-2-Link Flood 4,8W ww 300mm anodised aluminium



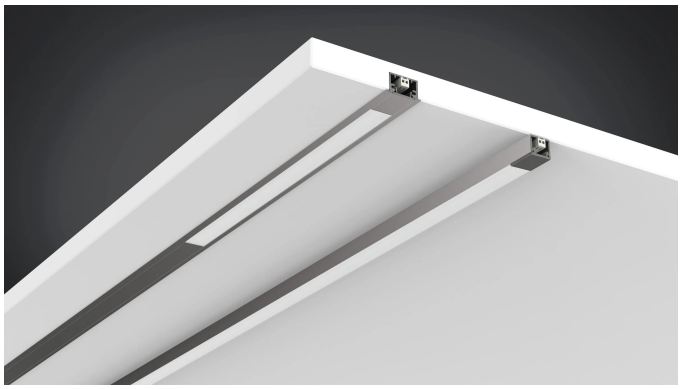

Description:
Linkable Area light Light bar, light colour warm white approx. 3000 K, Through-cable with LED 24 plug and LED 24 socket, optional accessories: Various A and Surface mounting-Profile and can be combined with different types of luminaires, Dimming controller with Wireless remote control, 1-10 V, DALI, ZigBee, Sonar or WiFi Control. Light colour: 3000 K warm white.



Connection:	LED-Trafo DC 24V
Light colour:	3000K Warm white
Beam angle:	120°
Energy efficiency:	LED: 107 lm/W; Leuchte: 935 lm/m (58 lm/W)
Energy efficiency class:	G
Symbols:	IP20, SK III
Weight:	0,03 kg

Special features:

- No visible points of light
- Light colour: 3000 K warm white
- Through cable with LED 24 plug and LED 24 socket
- Incl. Cover profile heavily frosted
- Incl. 2 x 25 mm Alu Cover profile
- Beam angle 120°
- Design: Linear-Light
- LED Transformer DC 24 V
- Connector system: LED 24
- Protection rating: IP20
- Dimmable with compatible control
- Max. power: 60 W per connection cable
- Housing colour: Anodised aluminium

Order number:
61002160102

limited availability

HERA LED WARRANTY 5 YEARS

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	Gehäusefarbe	light colour
61002160302	LED-2-Link Flood 4,8W ww 300mm black	Black	3000K Warm white
61002160102	LED-2-Link Flood 4,8W ww 300mm anodised aluminium	Anodized aluminum	3000K Warm white
61002160303	LED-2-Link Flood 4,8W nw 300mm black	Black	4000K Neutral white
61002160103	LED-2-Link Flood 4,8W nw 300mm anodised aluminium	Anodized aluminum	4000K Neutral white
61002161302	LED-2-Link Flood 10,4W ww 600mm black	Black	3000K Warm white
61002161102	LED-2-Link Flood 10,4W ww 600mm anodised aluminium	Anodized aluminum	3000K Warm white
61002161303	LED-2-Link Flood 10,4W nw 600mm black	Black	4000K Neutral white
61002161103	LED-2-Link Flood 10,4W nw 600mm anodised aluminium	Anodized aluminum	4000K Neutral white
61002162302	LED-2-Link Flood 16,1W ww 900mm black	Black	3000K Warm white
61002162102	LED-2-Link Flood 16,1W ww 900mm anodised aluminium	Anodized aluminum	3000K Warm white
61002162303	LED-2-Link Flood 16,1W nw 900mm black	Black	4000K Neutral white
61002162103	LED-2-Link Flood 16,1W nw 900mm anodised aluminium	Anodized aluminum	4000K Neutral white

Order number: 61002160102

