

Dynamic ModuLite F



230V under cabinet kitchen luminaire with adjustable colour appearance Dynamic LED ModuLite F 900mm 15W white



Description:

Flat LED under cabinet luminaire 230V, housing white, easy installation (screw-through), very small plug ($\varnothing = 7,5\text{mm}$), high-voltage-plug-in system by Tyco AMP, colour appearance adjustable between approx. 2700K (xw) and 5000K (cw) with different remote controls


Connection: 220 - 240V / 50 - 60Hz
Life: L70/B10 $\geq 60.000\text{h}$
Light colour: 2700 - 5000K (Dynamic) adjustable
Beam angle: 120°
Energy efficiency: LED: 122 lm/W; luminaire: 1583 lm/m (95 lm/W)
Energy efficiency class: E
Colour rendering: Ra/CRI ≥ 90
Symbols: CE, MM, IP20, SK II
EAN-No.: 4,05E+12
Weight: 0,39 kg

Special features:

- integrated HVLCS plug and socket in casing for uninterrupted strip lights (max. 300W)
- no visible luminous spots
- with integrated Dynamic controller
- dimmable
- colour appearance adjustable between approx. 2700K (xw) and 5000K (cw) with different remote controls

Dynamic ModuLite F

	120°	Ø	xw	cw
0,5m		610	2320 lx	2440 lx
1,0m		1220	580 lx	610 lx
1,5m		1830	258 lx	271 lx
2,0m		2440	145 lx	153 lx
2,5m		3050	93 lx	98 lx

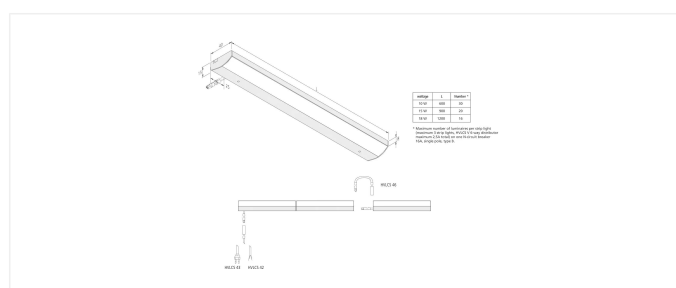


Order number:
20202583302

article in stock

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing
20202583202	Dynamic LED ModuLite F 600mm 10W white	White
20202583302	Dynamic LED ModuLite F 900mm 15W white	White
20202583402	Dynamic LED ModuLite F 1200mm 18W white	White
20202583203	Dynamic LED ModuLite F 600mm 10W black	Black
20202583303	Dynamic LED ModuLite F 900mm 15W black	Black
20202583403	Dynamic LED ModuLite F 1200mm 18W black	Black
20202583201	Dynamic LED ModuLite F 600mm 10W anodized aluminium	Anodized aluminium
20202583301	Dynamic LED ModuLite F 900mm 15W anodized aluminium	Anodized aluminium
20202583401	Dynamic LED ModuLite F 1200mm 18W anodized aluminium	Anodized aluminium

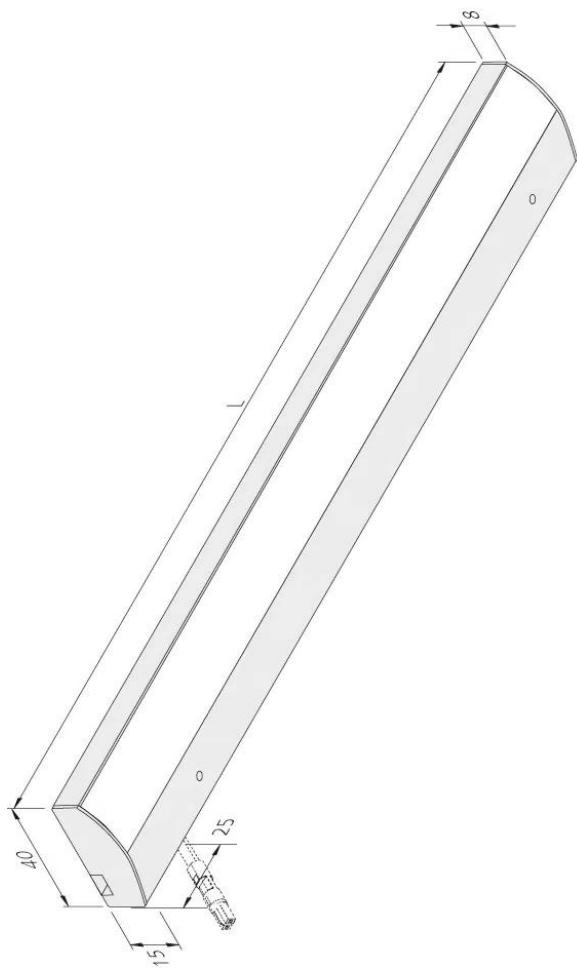

wattage	L	Number *
10 W	600	30
15 W	900	20
18 W	1200	16

* Maximum number of luminaires per strip light
(maximum 3 strip lights, HVLCs V 6-way distributor
maximum 2,5A total) on one N-circuit breaker
16A, single pole, type B.

