

SIL-LED 2

LED cabinet interior light SIL-LED 2 1167mm 4,7W nw



Description:

Schrankinnenleuchte with touchless IR Sensorschalter, Connection cable 2,5 m with LED 24 plug, light colour neutral white approx. 4000 K, Mounting clip for lateral Mounting with Pull-outs and 500 mm self-adhesive Cable duct included. For 16er Cabinet body. Incl. 500 mm Cable duct self-adhesive.


Connection: LED-Trafo DC 24V
Light colour: 4000K Neutral white
Beam angle: 110°
Energy efficiency: LED: 140 lm/W; Leuchte: 330 lm/m (83 lm/W)
Energy efficiency class: G
Symbols: IP20, SK III
Weight: 0,56 kg

Special features:

- Integrated touchless sensor switch, with "Soft On" and "Soft Off"
- Mounting clip for lateral Mounting in Pull-outs included
- For 16er Cabinet body
- Connection cable 2,5 m with LED 24 plug
- Anodised aluminium
- Light colour: 4000 K neutral white
- Incl. 500 mm Cable duct self-adhesive
- Design: Linear-Light
- LED Transformer DC 24 V
- Connector system: LED 24
- Protection rating: IP20

SIL-LED 2

	110°	Ø
0,5m		1428
1,0m		2856
1,5m		4284
2,0m		5713
2,5m		7141

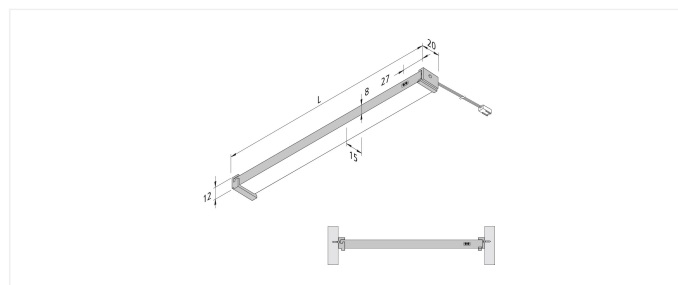

Order number:
61001213701

limited availability



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	Gehäusefarbe
61001214101	SIL-LED 2 411mm 1,3W nw	Anodized aluminum
61001213101	SIL-LED 2 417mm 1,3W nw	Anodized aluminum
61001214201	SIL-LED 2 461mm 1,7W nw	Anodized aluminum
61001213201	SIL-LED 2 467mm 1,7W nw	Anodized aluminum
61001214301	SIL-LED 2 561mm 2,1W nw	Anodized aluminum
61001213301	SIL-LED 2 567mm 2,1W nw	Anodized aluminum
61001214401	SIL-LED 2 761mm 2,9W nw	Anodized aluminum
61001213401	SIL-LED 2 767mm 2,9W nw	Anodized aluminum
61001214501	SIL-LED 2 861mm 3,4W nw	Anodized aluminum
61001213501	SIL-LED 2 867mm 3,4W nw	Anodized aluminum
61001214601	SIL-LED 2 961mm 3,8W nw	Anodized aluminum
61001213601	SIL-LED 2 967mm 3,8W nw	Anodized aluminum
61001214701	SIL-LED 2 1161mm 4,7W nw	Anodized aluminum
61001213701	SIL-LED 2 1167mm 4,7W nw	Anodized aluminum

