


Dynamic FR- / FQ 68/78



Flat recessed luminaire round with adjustable colour appearance Dynamic FR 68-LED 4W black

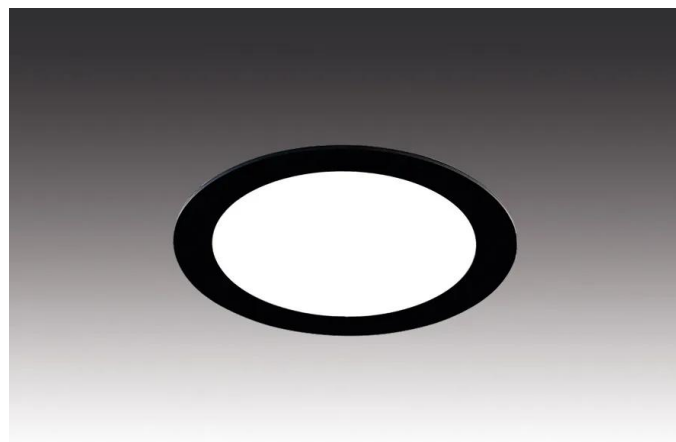

Descripción:

LED recessed spotlight with planar light, plastic housing, connecting cable 2.5m with dynamic plug, light color adjustable between approx. 2700K and 5000K, quick and easy installation with snap-in hooks, optional accessories: mounting spring for a secure hold in lightweight ceilings, surface-mounting ring for installation without mounting hole, control via radio remote control or WiFi controller

Conexión: LED-Trafo DC 24V
Vida útil: L70/B10 >= 50.000h
Lichtfarbe: 2700 – 5000K (Dynamic) ajustable
Ausstrahlungswinkel: 110°
Eficiencia energética: LED: 113 lm/W; luminaire: 270 lm (68 lm/W)
Energieeffizienzklasse: G
Reproducción de colores: Ra/CRI >= 93
Zeichen: CE, MM, UL, IP44, SK III
EAN-Nr.: 4,05E+12
Gewicht: 0,07 kg

Particularidades:

- flush mounting in 16mm panels
- no visible luminous spots
- light colour adjustable between approx. 2700K (xw) and 5000K (cw)


Dynamic FR-/FQ 68-LED

	110°	Ø	ww	nw	cw
0,5m		620	372 lx	400 lx	444 lx
1,0m		1240	93 lx	100 lx	111 lx
1,5m		1860	41 lx	44 lx	49 lx
2,0m		2480	23 lx	25 lx	28 lx
2,5m		3100	15 lx	16 lx	18 lx

Agujero



68mm





N.º de artículo:
61001600103

artículo disponible en stock

Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la carcasa
61001600103	Dynamic FR 68-LED 4W black	Negro
61001600106	Dynamic FR 68-LED 4W matt chrome	Cromo mate
61001600108	Dynamic FR 68-LED 4W stainless steel	Aspecto acero inoxidable
61057230108	set of 3 Dynamic FR 68-LED 4W stainless steel	Aspecto acero inoxidable

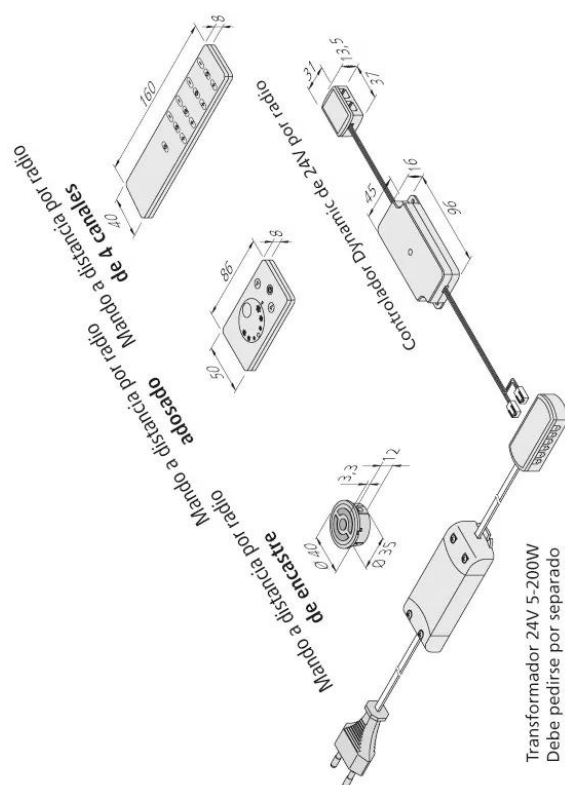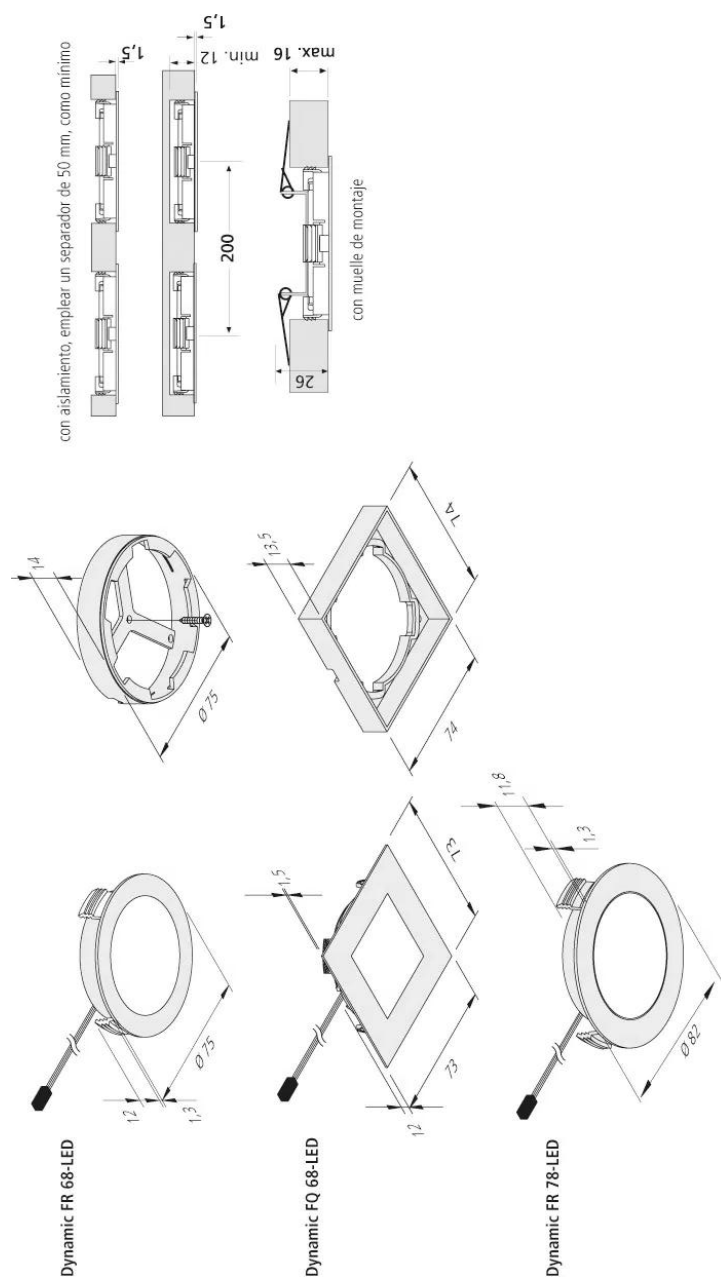

Transformador 24V 5-200W
Debe pedirse por separado