


Dynamic SR 68



Swivel and tilt recessed ceiling spotlight with adjustable colour appearance Dynamic SR 68-LED 6,5W stainless steel look

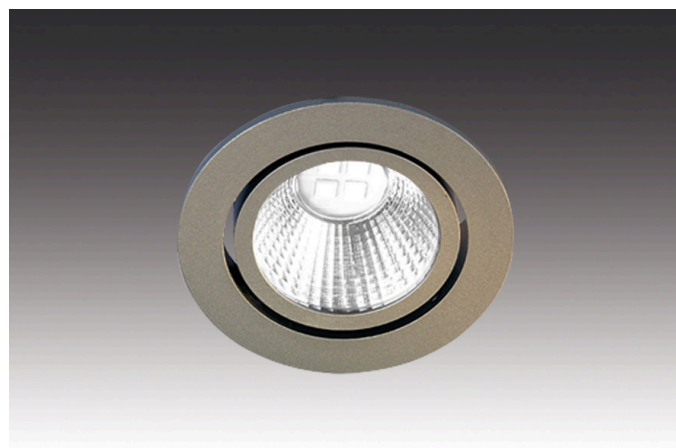

Descripción:

Swiveling LED recessed spotlight, metal housing, connecting cable 2.5m with dynamic plug, light color adjustable between approx. 2700K and 5000K, quick and easy mounting by spring terminals, control via various radio remote controls, DALI or WiFi controller

Conexión: LED-Trafo DC 24 V
Vida útil: L70/B10 >= 50.000 h
Lichtfarbe: 2700 – 5000 K (Dynamic) ajustable
Ausstrahlungswinkel: 40°
Eficiencia energética: LED: 105 lm/W; luminaire: 420 lm (65 lm/W)
Energieeffizienzklasse: G
Reproducción de colores: Ra/CRI >= 90
Zeichen: CE, MM, IP44, UGR<19, SK III
EAN-Nr.: 4051268162975
Gewicht: 0,145 kg

Particularidades:

- swivels and tilts 20° to both sides
- metal casing
- colour appearance adjustable between 2700K (xw) and 5000K (cw)
- suitable for screen workplaces! (UGR < 19)



Dynamic SR 68

	40°	Ø	xw	nw	cw
0,5m		300	2960 lx	3160 lx	3400 lx
1,0m		600	740 lx	790 lx	850 lx
1,5m		900	329 lx	351 lx	378 lx
2,0m		1200	185 lx	198 lx	213 lx
2,5m		1500	118 lx	126 lx	136 lx

Agujero



68-74mm (ohne Ring) , 68-84mm (mit Ring)



N.º de artículo:
20202750108

disponibilidad restringida probable

Versiónes disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la carcasa
20202750108	Dynamic SR 68-LED 6,5W stainless steel look	aspecto acero inoxidable
20202750106	Dynamic SR 68-LED 6,5W matt chrome	cromo mate
20202750101	Dynamic SR 68-LED 6,5W white	blanco

