

AR 78 / AQ 78

Powerful, flat aluminium recessed luminaire round AR 78-LED 7,5W ww white



Descripción:

LED recessed spotlight, aluminum housing, connecting cable 2.5m with LED 24-plug, light color warm white approx. 3000K, quick and easy installation with snap-in hooks, optional accessories: dimming controller with radio remote control, WiFi app, DALI or 1-10V dimmer, mounting spring for screwing on for secure hold in lightweight ceilings

Conexión: LED-Trafo DC 24V
Vida útil: L70/B10 >= 60.000h
Lichtfarbe: 3000K blanco cálido
Ausstrahlungswinkel: 80°
Eficiencia energética: LED: 90 lm/W; luminaire: 450 lm (60 lm/W)
Energieeffizienzklasse: G
Reproducción de colores: Ra/CRI >= 98
Zeichen: CE, MM, UL, IP44, SK III
EAN-Nr.: 4,05E+12
Gewicht: 0,115 kg

Particularidades:

- flush mounting in 16mm panels
- metal casing
- genuine glass cover
- with mounting spring also ideal for the use in plasterboard ceilings
- glare-free with recessed reflector and clear diffuser


AR 78 / AQ 78

	80°	Ø	ww	nw
0,5m		500	888 lx	960 lx
1,0m		1000	222 lx	240 lx
1,5m		1500	99 lx	107 lx
2,0m		2000	56 lx	60 lx
2,5m		2500	36 lx	38 lx

Agujero



78mm

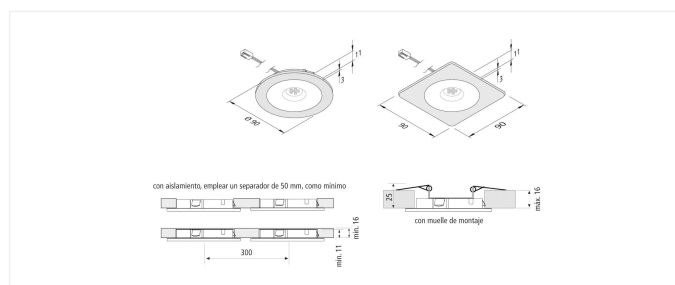




N.º de artículo:
61001430201

artículo disponible en stock

Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la carcasa	Color de la luz
61001430201	AR 78-LED 7,5W ww white	Blanco	3000K blanco cálido
61001430203	AR 78-LED 7,5W ww black	Negro	3000K blanco cálido
61001430208	AR 78-LED 7,5W ww stainless steel look	Aspecto acero inoxidable	3000K blanco cálido
61001430301	AR 78-LED 7,5W nw white	Blanco	4000K blanco neutro
61001430303	AR 78-LED 7,5W nw black	Negro	4000K blanco neutro
61001430308	AR 78-LED 7,5W nw stainless steel look	Aspecto acero inoxidable	4000K blanco neutro

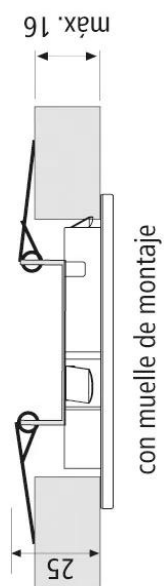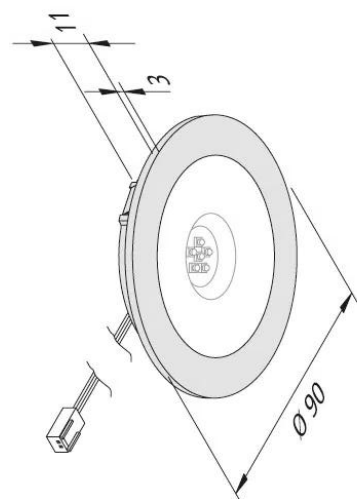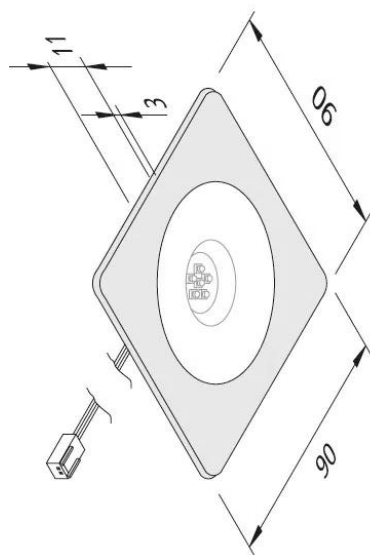

con aislamiento, emplear un separador de 50 mm, como mínimo

