

FR/FQ 65/205



Dimmable recessed/surface mounted luminaire round FR 65/205-LED 18W xw white



Descripción:

Dimmable recessed / surface mounted luminaire with planar light, plastic housing, incl. terminal for 230V with integrated through-wiring, colour appearance xw (extra warm white) approx. 2700K, quick and easy installation with adjustable mounting springs for all drill holes from 65 to 205 mm, dimmable with phase dimmer

Conexión: 220 - 240V / 50 - 60Hz
Vida útil: L70/B10 >= 35.000 h
Lichtfarbe: 2700 K blanco extra cálido
Ausstrahlungswinkel: 115°
Eficiencia energética: LED: 100 lm/W; luminaire: 1170 lm (65 lm/W)
Energieeffizienzklasse: G
Reproducción de colores: Ra/CRI >= 80
Zeichen: CE, MM, IP20, SK II
EAN-Nr.: 4051268198936
Gewicht: 0,362 kg

Particularidades:

- Direct connection to 230V with integrated through-wiring
- no visible luminous spots
- adjustable mounting spring for all drill holes from 65 to 205mm
- recommended phase dimmer: Busch-Jaeger 6523U-102, Jung 1730DD or Sygonix 33594R


FR- / FQ 65/205

	115°	Ø	xw	ww	nw
0,5m		650	1580 lx	1660 lx	1744 lx
1,0m		1300	395 lx	415 lx	436 lx
1,5m		1950	176 lx	184 lx	194 lx
2,0m		2600	99 lx	104 lx	109 lx
2,5m		3250	63 lx	66 lx	70 lx

Agujero



65-205mm

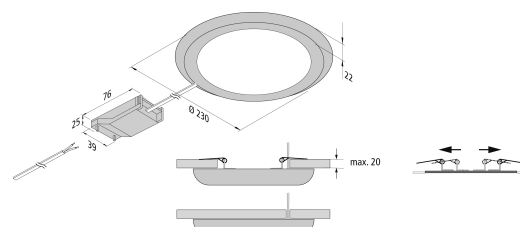

N.º de artículo:
20203070103

disponibilidad restringida probable

Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la carcasa	Color de la luz
20203070103	FR 65/205-LED 18W xw white	blanco	2700 K blanco extra cálido
20203070603	FR 65/205-LED 18W xw matt chrome	cromo mate	2700 K blanco extra cálido
20203070102	FR 65/205-LED 18W ww white	blanco	3000 K blanco cálido
20203070602	FR 65/205-LED 18W ww matt chrome	cromo mate	3000 K blanco cálido
20203070101	FR 65/205-LED 18W nw white	blanco	4000 K blanco neutro
20203070601	FR 65/205-LED 18W nw matt chrome	cromo mate	4000 K blanco neutro

