


FR/FQ 65/205



Dimmable recessed/surface mounted luminaire square FQ 65/205-LED 18W xw white

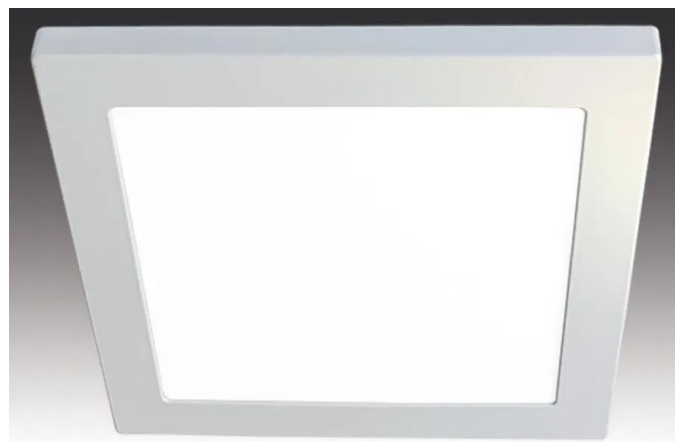

Descripción:

Dimmable recessed / surface mounted luminaire with planar light, plastic housing, incl. terminal for 230V with integrated through-wiring, colour appearance xw (extra warm white) approx. 2700K, quick and easy installation with adjustable mounting springs for all drill holes from 65 to 205mm, dimmable with phase dimmer

Conexión: 220 - 240V / 50 - 60Hz
Vida útil: L70/B10 >= 35.000h
Lichtfarbe: 2700K blanco extra cálido
Ausstrahlungswinkel: 115°
Eficiencia energética: LED: 100 lm/W; luminaire: 1170 lm (65 lm/W)
Energieeffizienzklasse: G
Reproducción de colores: Ra/CRI >= 80
Zeichen: CE, MM, IP20, SK II
EAN-Nr.: 4,05E+12
Gewicht: 0,462 kg

Particularidades:

- Direct connection to 230V with integrated through-wiring
- no visible luminous spots
- adjustable mounting spring for all drill holes from 65 to 205mm
- recommended phase dimmer: Busch-Jaeger 6523U-102, Jung 1730DD or Sygonix 33594R


FR- / FQ 65/205

	115°	Ø	xw	ww	nw
0,5m		650	1580 lx	1660 lx	1744 lx
1,0m		1300	395 lx	415 lx	436 lx
1,5m		1950	176 lx	184 lx	194 lx
2,0m		2600	99 lx	104 lx	109 lx
2,5m		3250	63 lx	66 lx	70 lx

Agujero



65-205mm

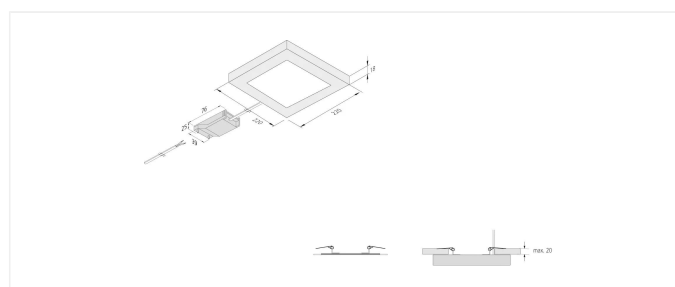

N.º de artículo:
20203080103

disponibilidad restringida probable

Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la luz
20203080103	FQ 65/205-LED 18W xw white	2700K blanco extra cálido
20203080102	FQ 65/205-LED 18W ww white	3000K blanco cálido
20203080101	FQ 65/205-LED 18W nw white	4000K blanco neutro

