


UL 2-LED F



Stainless steel triangular luminaire with homogeneous planar light UL 2-LED F 3W ww stainless steel

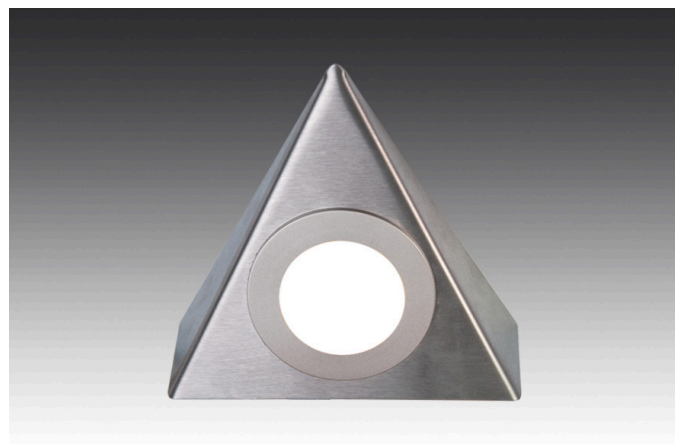

Descripción:

LED under cabinet luminaire with homogeneous planar light, housing stainless steel, supply cable 2,5 m with LED 24 plug, colour appearance ww (warm white) approx. 3000K, optional accessories: dim controller with remote control, 1-10V, DALI or WiFi to switch and dim



Conexión: LED-Trafo DC 24 V
Vida útil: L70/B10 >= 50.000 h
Lichtfarbe: 3000 K blanco cálido
Ausstrahlungswinkel: 110°
Eficiencia energética: LED: 113 lm/W; luminaire: 210 lm (70 lm/W)
Energieeffizienzklasse: G
Reproducción de colores: Ra/CRI >= 93
Zeichen: CE, MM, IP20, SK III
EAN-Nr.: 4051268130790
Gewicht: 0,175 kg

Particularidades:

- housing of brushed stainless steel
- electronic contact switch EBS 4 as accessory
- no visible luminous spots

UL 2-LED F

	110°	Ø	ww	nw
0,5m		620	320 lx	340 lx
1,0m		1240	80 lx	85 lx
1,5m		1860	36 lx	38 lx
2,0m		2480	20 lx	21 lx
2,5m		3100	13 lx	14 lx



N.º de artículo:
61001461002

artículo disponible en stock

Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la luz
61001461002	UL 2-LED F 3W ww stainless steel	3000 K blanco cálido
61001461003	UL 2-LED F 3W nw stainless steel	4000 K blanco neutro
61055931102	set of 3 UL 2-LED F 3W ww stainless steel	3000 K blanco cálido
61055931103	set of 3 UL 2-LED F 3W nw stainless steel	4000 K blanco neutro
61055931202	set of 3 UL 2-LED F 3W ww stainless steel with switch EBS	3000 K blanco cálido
61055931203	set of 3 UL 2-LED F 3W nw stainless steel with switch EBS	4000 K blanco neutro

