

AR 68



Flat recessed luminaire with metal casing AR 68-LED 4W xw black



Descripción:

LED recessed luminaire with low glare, metal housing, supply cable 2.5m with LED 24 plug for direct plug-in connection at the spotlight, colour appearance extra warm white approx. 2700K, quick and easy installation with snap-in hook, optional accessories: dim controller with radio remote control, Alexa, WiFi, DALI, ZigBee, Casambi, Sonar or 1-10V dimmer, mounting spring to screw on for the use in lightweight ceilings

Conexión: LED-Trafo DC 24 V
Vida útil: L70/B10 >= 60.000 h
Lichtfarbe: 2700 K blanco extra cálido
Ausstrahlungswinkel: 60°
Eficiencia energética: LED: 120 lm/W; luminaire: 300 lm (75 lm/W)
Energieeffizienzklasse: G
Reproducción de colores: Ra/CRI >= 93
Zeichen: CE, MM, IP44, SK III
EAN-Nr.: 4051268218924
Gewicht: 0,079 kg

Particularidades:

- metal casing
- flush mounting in 16 mm panels
- glare-free with recessed reflector and clear diffuser

AR 68

60°	Ø	xw	ww	nw
0,5m	425	1008 lx	1080 lx	1156 lx
1,0m	850	252 lx	270 lx	289 lx
1,5m	1275	112 lx	120 lx	128 lx
2,0m	1700	63 lx	68 lx	72 lx
2,5m	2125	40 lx	43 lx	46 lx

Agujero



68mm




N.º de artículo:
20203233004

disponibilidad restringida probable

Versiónes disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la carcasa	Color de la luz
20203233004	AR 68-LED 4W xw black	negro	2700 K blanco extra cálido
20203238004	AR 68-LED 4W xw stainless steel look	aspecto acero inoxidable	2700 K blanco extra cálido
20203233002	AR 68-LED 4W ww black	negro	3000 K blanco cálido
20203238002	AR 68-LED 4W ww stainless steel look	aspecto acero inoxidable	3000 K blanco cálido
20203233003	AR 68-LED 4W nw black	negro	4000 K blanco neutro
20203238003	AR 68-LED 4W nw stainless steel look	aspecto acero inoxidable	4000 K blanco neutro

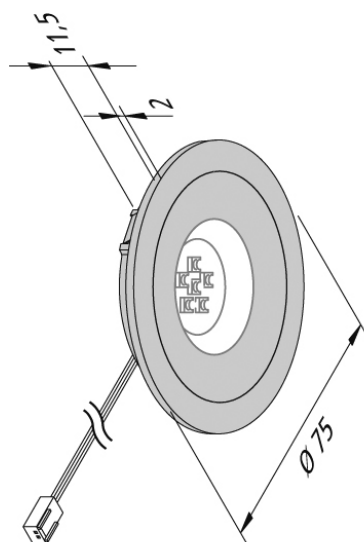

con aislamiento, emplear un separador de 50 mm, como mínimo

