

## IN-Stick MF



7mm flat aluminium recessed luminaire LED IN-Stick MF 330mm 5,8W ww



### Descripción:

Lean recessed LED luminaire with homogeneous planar light for milled groove 20mm wide and 7mm deep, housing aluminum, supply cable 2.5m with LED 24 plug, colour appearance ww (warm white) approx. 3000K, optional accessories: dim controller with remote control, DALI or 1-10V

**Conexión:** LED-Trafo DC 24 V  
**Vida útil:** L70/B10 >= 50.000 h  
**Lichtfarbe:** 3000 K blanco cálido  
**Ausstrahlungswinkel:** 100°  
**Eficiencia energética:** LED 120 lm/W; luminaire: 1029 lm/m (55 lm/W)


**Energieeffizienzklasse:** G  
**Reproducción de colores:** Ra/CRI >= 95  
**Zeichen:** CE, MM, IP44, SK III  
**EAN-Nr.:** 4051268219242  
**Gewicht:** 0,075 kg

### Particularidades:

- only 7 mm depth of the groove
- no visible luminous spots

### IN-Stick MF

	100°	Ø	ww	nw
0,5m		560	1444 lx	1548 lx
1,0m		1120	361 lx	387 lx
1,5m		1680	160 lx	172 lx
2,0m		2240	90 lx	97 lx
2,5m		2800	58 lx	62 lx

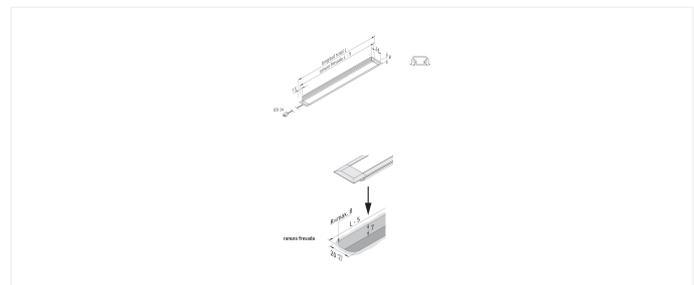

N.º de artículo:  
61002550102



disponibilidad restringida probable



## Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la luz
<b>61002550102</b>	<b>LED IN-Stick MF 330mm 5,8W ww</b>	<b>3000 K blanco cálido</b>
61002550202	LED IN-Stick MF 530mm 9,6W ww	3000 K blanco cálido
61002550302	LED IN-Stick MF 830mm 15,1W ww	3000 K blanco cálido
61002550402	LED IN-Stick MF 1130mm 20,4W ww	3000 K blanco cálido
61002550103	LED IN-Stick MF 330mm 5,8W nw	4000 K blanco neutro
61002550203	LED IN-Stick MF 530mm 9,6W nw	4000 K blanco neutro
61002550303	LED IN-Stick MF 830mm 15,1W nw	4000 K blanco neutro
61002550403	LED IN-Stick MF 1130mm 20,4W nw	4000 K blanco neutro

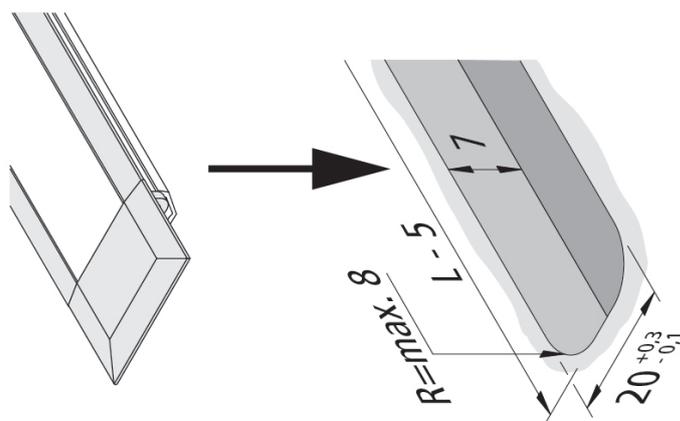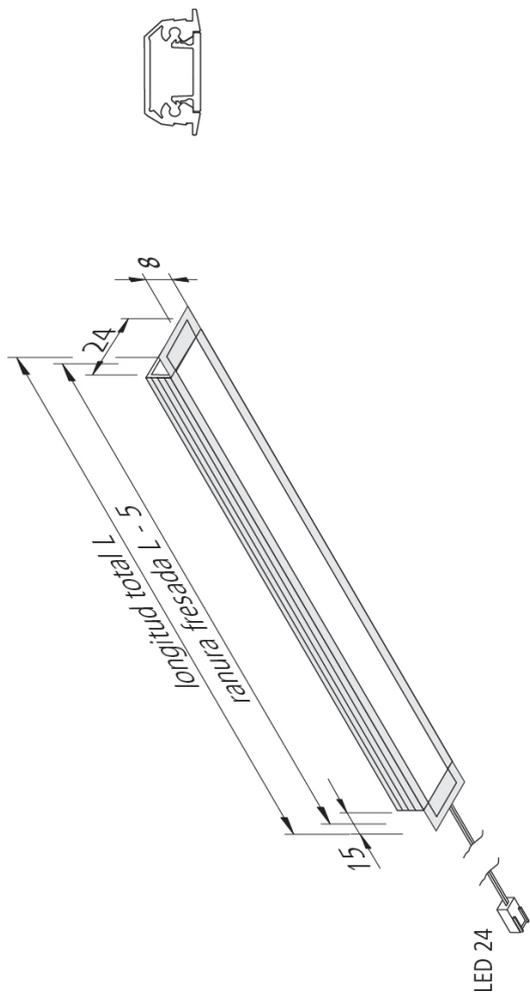

ranura fresada