


## 24V Dynamic Smart System



Control de iluminación para la temperatura de color 24V Dynamic-Controller Smart System 75W without wireless remote control (only as an extension to controllers incl. wireless remote control)

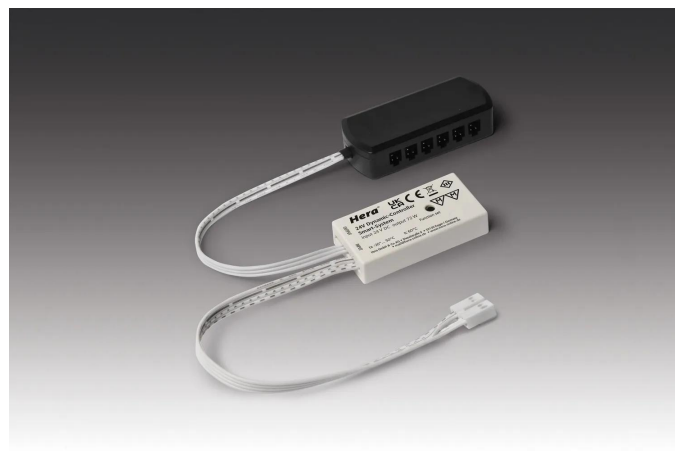

### Descripción:

Dynamic controller 24V DC as an extension for programming to an existing wireless remote control, with memory function (the previous status is restored after disconnection from the mains), connecting cable with two LED 24 plugs and 12-way distributor for the lights

**Conexión:** LED-Trafo DC 24V

**Zeichen:** CE, MM, IP20, SK III

**EAN-Nr.:** 4,05E+12

**Gewicht:** 0,05 kg

### Particularidades:

Connection: 24V DC / for Dynamic luminaires with Dynamic plug  
Other:

- easy plug-in connection for new or existing installations
- with memory function (after disconnection from the mains, the previous dimming status is restored)
- Radio remote controls for dimming, switching and colour setting
- flush-mounted touch remote control for dimming, switching and colour setting with customary push button (operating distance 15m / less for walls and ceilings)
- 4 channel remote control with master button and wall mounting
- 3 channel H-iDrive remote control with master button and wall mounting
- surface mounted remote control with wall mounting
- multiple radio controllers can be activated simultaneously using one remote control
- all controllers with „Soft Off“ and „Multicontrol“ (it is possible to program up to 4 remote controls to one controller)

**N.º de artículo:**  
20805003101

disponibilidad restringida probable

## Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

| N.º de artículo | Denominación                                                                                                                                | Grado de protección | Sistema de enchufe | Clase de protección | Conexión         |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------------|---------------------|------------------|
| 20805003101     | 24V Dynamic-Controller Smart System 75W without wireless remote control (only as an extension to controllers incl. wireless remote control) | IP20                | Dynamic            | SK3                 | LED-Trafo DC 24V |
| 61500053404     | 24V Dynamic Controller Smart System 75W incl. UP wireless button module                                                                     | IP20                | Dynamic            | SK3                 | LED-Trafo DC 24V |
| 61500053402     | 24V Dynamic-Controller Smart System 75W incl. 4-channel wireless remote control                                                             | IP20                | Dynamic            | SK3                 | LED-Trafo DC 24V |
| 61500053403     | 24V Dynamic-Controller Smart System 75W incl. 3-channel H-iDrive wireless remote control                                                    | IP20                | Dynamic            | SK3                 | LED-Trafo DC 24V |
| 61500053401     | 24V Dynamic-Controller Smart System 75W incl. surface-mounted wireless remote control black                                                 | IP20                | Dynamic            | SK3                 | LED-Trafo DC 24V |
| 22099080430     | Magnetic base + wall plate H-iDrive                                                                                                         | -                   | LED 24             | -                   | -                |