


Q 68



Flat recessed luminaire square Q 68-LED 2,5W ww stainless steel

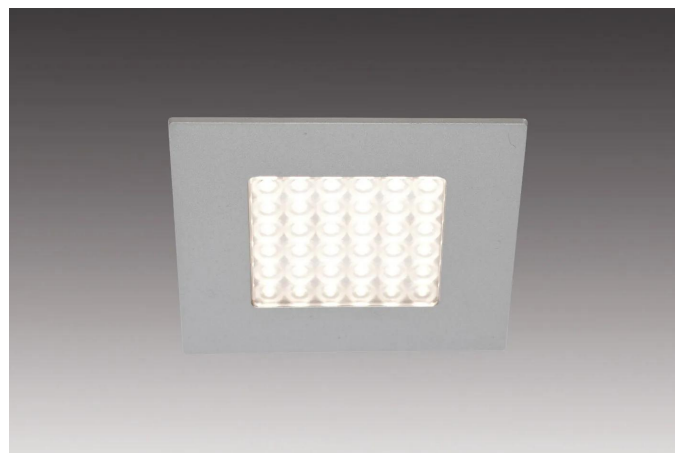

Descripción:

Square recessed LED spotlight for 68mm bore, plastic housing, connecting cable 2.5m with LED 24-plug, light color warm white approx. 3000K, quick and easy installation with snap-in hooks, optional accessories: dimmable transformer with remote control or 1-10V dimmer, mounting spring for a secure hold in lightweight ceilings, surface-mounting ring for installation without mounting hole

Conexión: LED-Trafo DC 24V
Vida útil: L70/B10 >= 60.000h
Lichtfarbe: 3000K blanco cálido
Ausstrahlungswinkel: 53°
Eficiencia energética: LED: 98 lm/W, luminaire: 185 lm (74 lm/W)
Energieeffizienzklasse: G
Reproducción de colores: Ra/CRI >= 93
Zeichen: CE, MM, IP44, SK III
EAN-Nr.: 4,05E+12
Gewicht: 0,085 kg

Particularidades:

- flush mounting in 16mm panels


R 68 / Q 68

53°	Ø	ww	nw
0,5m	420	652 lx	752 lx
1,0m	840	163 lx	188 lx
1,5m	1260	72 lx	84 lx
2,0m	1680	41 lx	47 lx
2,5m	2100	26 lx	30 lx

Agujero



68mm



N.º de artículo:
61001262208

disponibilidad restringida probable

Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación
61001262208	Q 68-LED 2,5W ww stainless steel

