

Accesorios foco empotrable

Adapter ring SR 68 square matt chrome





Descripción:

Adapter ring square for mounting in drill holes up to 84 mm

Zeichen: CE, MM

EAN-Nr.: 4,05E+12

Gewicht: 0,029 kg

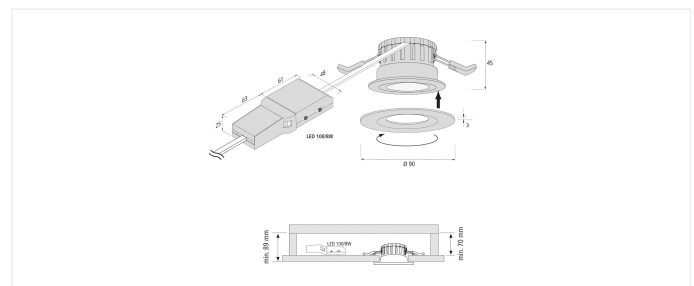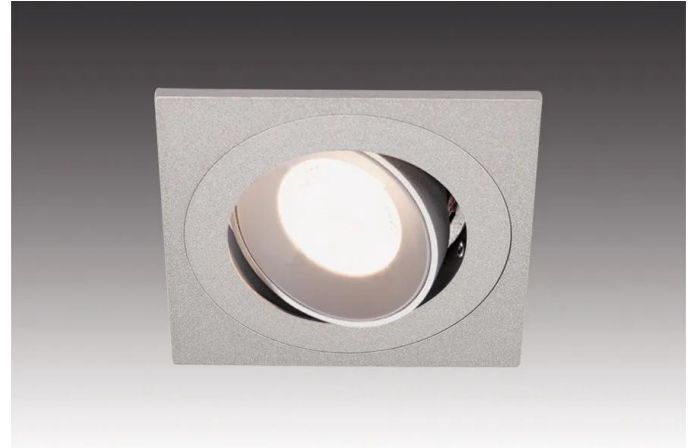

N.º de artículo:
20501021416

disponibilidad restringida probable

Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Diámetro de perforación	Color de la carcasa	Conexión
20501021506	Mounting ring R 55 matt chrome	-	-	-
20501021508	Mounting ring R 55 stainless steel	-	-	-
20501021106	Mounting ring R 68 matt chrome	-	-	-
20501021108	Mounting ring R 68 stainless steel look	-	-	-
20501021803	Mounting ring R 68 black	-	-	-
20501021206	Mounting ring Q 68 matt chrome	-	-	-
20501021208	Mounting ring Q 68 stainless steel look	-	-	-
20501021203	Mounting ring Q 68 black	-	-	-
61500030121	Muelle de montaje AR 35	-	-	-
61500030111	Mounting spring AR 45	-	-	-
61500030101	Mounting spring AR/AQ/FAR/FAQ/ 68-78	68-78mm	-	-
61500030131	Mounting spring HV 68/78	68-78mm	-	-
20501021406	Adapter ring SR 68 round matt chrome	-	-	-
20501021408	Adapter ring SR 68 round stainless steel look	-	-	-
20501021401	Adapter ring SR 68 round white	-	-	-
20501021416	Adapter ring SR 68 square matt chrome	-	-	-
20501021418	Adapter ring SR 68 square stainless steel	-	-	-
20501021411	Adapter ring SR 68 square white	-	-	-
20501021908	Mounting ring AR 68 stainless steel	-	-	-
20501021903	Mounting ring AR 68 black	-	-	-
20501022008	Mounting ring AQ 68 stainless steel	-	-	-
20501022003	Mounting ring AQ 68 black	-	-	-
20501022108	Mounting ring AR 58 stainless steel look	-	Aspecto acero inoxidable	-
20501022103	Mounting ring AR 58 black	-	Negro	-
20501022201	Anillo decorativo Eco R 68 redondo blanco	-	Blanco	-
20501022203	Anillo decorativo Eco R 68 redondo negro	-	Negro	220 - 240V / 50 - 60Hz
20501022204	Anillo decorativo Eco R 68 redondo cromo brillante	-	Cromo mate	220 - 240V / 50 - 60Hz
20501022208	Anillo decorativo Eco R 68 redondo color acero inox	-	Aspecto acero inoxidable	220 - 240V / 50 - 60Hz

