

FR 68- / FR 78- / FQ 68

Flat recessed luminaire FR 78-LED 4W nw stainless steel look



Descripción:

LED recessed spotlight with planar light, plastic housing, connecting cable 2.5m with LED 24-plug, light color neutral white approx. 4000K, quick and easy installation with snap-in hooks, optional accessories: dim controller with remote control, DALI or 1-10V dimmer, mounting spring for a secure hold in lightweight ceilings, surface-mounting ring for installation without mounting hole

Conexión: LED-Trafo DC 24V
Vida útil: L70/B10 >= 50.000h
Lichtfarbe: 4000K blanco neutro
Ausstrahlungswinkel: 110°
Eficiencia energética: LED: 113 lm/W; luminaire: 270 lm (68 lm/W)
Energieeffizienzklasse: G
Reproducción de colores: Ra/CRI >= 93
Zeichen: CE, MM, UL, IP44, SK III
EAN-Nr.: 4,05E+12
Gewicht: 0,07 kg

Particularidades:

- flush mounting in 16mm panels
- no visible luminous spots


FR-/FQ 68/78

	110°	Ø	xw	ww	nw
0,5m		620	416 lx	440 lx	440 lx
1,0m		1240	104 lx	110 lx	110 lx
1,5m		1860	46 lx	49 lx	49 lx
2,0m		2480	26 lx	28 lx	28 lx
2,5m		3100	17 lx	18 lx	18 lx

Agujero



78mm

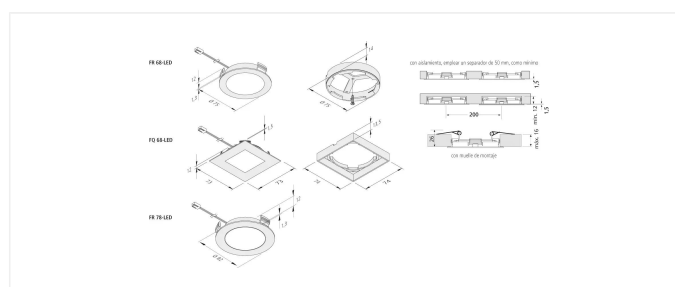

N.º de artículo:
61001760308

disponibilidad restringida probable

Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la carcasa	Color de la luz
61001760206	FR 78-LED 4W ww matt chrome	Cromo mate	3000K blanco cálido
61001760208	FR 78-LED 4W ww stainless steel look	Aspecto acero inoxidable	3000K blanco cálido
61001760306	FR 78-LED 4W nw matt chrome	Cromo mate	4000K blanco neutro
61001760308	FR 78-LED 4W nw stainless steel look	Aspecto acero inoxidable	4000K blanco neutro
61056838002	set of 3 FR 78-LED 4W ww stainless steel look	Aspecto acero inoxidable	3000K blanco cálido
61056838003	set of 3 FR 78-LED 4W nw stainless steel look	Aspecto acero inoxidable	4000K blanco neutro
61056858002	set of 5 FR 78-LED 4W ww stainless steel look	Aspecto acero inoxidable	3000K blanco cálido
61056858003	set of 5 FR 78-LED 4W nw stainless steel look	Aspecto acero inoxidable	4000K blanco neutro

