


## SR 68



Swivel and tilt recessed ceiling spotlight for 68-80mm ceiling cut-out SR 68-LED 4,8W 35° nw stainless steel look

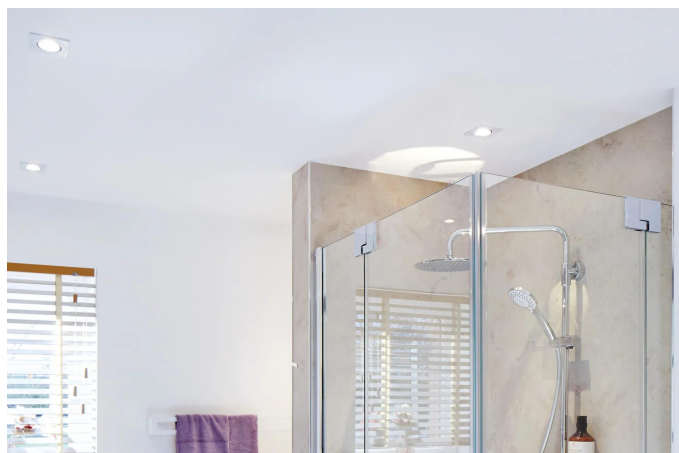

### Descripción:

Swiveling LED recessed spotlight, metal housing, connecting cable 0.2m with LED 350 plug, quick and easy installation by spring clips, optional accessories: dimmable transformer for phase dimmer or 1-10V dimmer, light color neutral white approx. 4000K, gimbal swivel around each 20°

**Conexión:** LED-Trafo DC 350mA  
**Vida útil:** L70/B10 >= 70.000h  
**Lichtfarbe:** 4000K blanco neutro  
**Ausstrahlungswinkel:** 35°  
**Eficiencia energética:** LED: 120 lm/W luminaire 485 lm (100 lm/W incl. transformer)  
**Energieeffizienzklasse:** E  
**Reproducción de colores:** Ra/CRI >= 90  
**Zeichen:** CE, MM, UL, IP44, UGR<19, SK III  
**EAN-Nr.:** 4,05E+12  
**Gewicht:** 0,11 kg

### Particularidades:

- swivels and tilts 20° to both sides
- metal casing
- suitable for screen workplaces! (UGR < 19)


### SR 68 4,8W

| 35°  | Ø    | xw      | ww      | nw      |
|------|------|---------|---------|---------|
| 0,5m | 280  | 3650 lx | 3880 lx | 4216 lx |
| 1,0m | 560  | 912 lx  | 970 lx  | 1054 lx |
| 1,5m | 840  | 406 lx  | 431 lx  | 468 lx  |
| 2,0m | 1120 | 228 lx  | 243 lx  | 264 lx  |
| 2,5m | 1400 | 146 lx  | 155 lx  | 169 lx  |

### Agujero



68-74mm (ohne Ring)  
 68-84mm (mit Ring)



N.º de artículo:  
 20202401901

disponibilidad restringida probable

## Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

| N.º de artículo | Denominación                               | Color de la carcasa      | Ángulo del haz | Color de la luz           |
|-----------------|--------------------------------------------|--------------------------|----------------|---------------------------|
| 20202401401     | SR 68-LED 4,8W 35° xw matt chrome          | Cromo mate               | 35°            | 2700K blanco extra cálido |
| 20202402001     | SR 68-LED 4,8W 35° xw stainless steel look | Aspecto acero inoxidable | 35°            | 2700K blanco extra cálido |
| 20202401701     | SR 68-LED 4,8W 35° xw white                | Blanco                   | 35°            | 2700K blanco extra cálido |
| 20202400201     | SR 68-LED 4,8W 22° ww matt chrome          | Cromo mate               | 22°            | 3000K blanco cálido       |
| 20202401201     | SR 68-LED 4,8W 35° ww matt chrome          | Cromo mate               | 35°            | 3000K blanco cálido       |
| 20202401801     | SR 68-LED 4,8W 35° ww stainless steel look | Aspecto acero inoxidable | 35°            | 3000K blanco cálido       |
| 20202401501     | SR 68-LED 4,8W 35° ww white                | Blanco                   | 35°            | 3000K blanco cálido       |
| 20202400301     | SR 68-LED 4,8W 22° nw matt chrome          | Cromo mate               | 22°            | 4000K blanco neutro       |
| 20202401301     | SR 68-LED 4,8W 35° nw matt chrome          | Cromo mate               | 35°            | 4000K blanco neutro       |
| 20202401901     | SR 68-LED 4,8W 35° nw stainless steel look | Aspecto acero inoxidable | 35°            | 4000K blanco neutro       |
| 20202401601     | SR 68-LED 4,8W 35° nw white                | Blanco                   | 35°            | 4000K blanco neutro       |
| 20202401001     | SR 68-LED 4,8W 35° xw black                | Negro                    | 35°            | 2700K blanco extra cálido |
| 20202400801     | SR 68-LED 4,8W 35° ww black                | Negro                    | 35°            | 3000K blanco cálido       |

